Table of Contents

FAQ	Common Questions	3
	Materials & Construction	4
	Available Wood Species	5-6
	Base Styles	7
	Base Molding Options	8
	Framing Bead and Panel Raises	9
	Free-Standing vs. In-Series	10
	Online Quoting System – New	11
	TFL, Thermally Fused Laminates – Preview – AVAILABLE SUMMER 2025	12
WOOD RANGE HOODS	All Hood Series – See next page for complete list	
	Bedford (BXD) – NEW	19-20
	Bristol (BX) – new Kerf-Cut option	21
	ER Showcase (ER200, ER300, ER400, ER500, ER600) – NEW	37-38
	Saddlebrook (SB100) – NEW	83-84
	Victoria (VX) - NEW	87-88
VENTILATION	Stainless Base w/ Baffle Filters (SS-BASE) – NEW FINISHES	97-98
	Stainless Base w/ Baffle Filters (SS-BASE) — Specs	99-100
	Pro Mesh (PML) Vents – Specs	101-102
	Pro Baffle (PBL) Vents – Specs	103-104
	PML – PBL – SS-BASE – Duct Height Guide	105
	Imperial Premium (IPL) Vents – Specs	107-108
	Imperial Standard (ISL) Vents – Specs	109-110
	IPL – ISL – Duct Height Guide	111
	General Vent Guidelines	112
MODIFICATIONS/ ACCESSORIES	Removable Options	113-115
	Curved and Straight Battens	116
	Applied Hardwood and Molding Wraps	117
	Anvil Finish, Anvil Curved/Straight Battens, Applied Hardwood & Molding Wraps	119-122
	Sorrento Supports – Spice Rack Pull-Outs	123
	Corbels	124-125

Range Hood Index

	Axton (AX-Series)	13-14
	Ashland (A-Series)	15-16
	Birmingham (B-Series)	17-18
NEW – Available April 2025	Bedford (BXD-Series)	19-20
NEW OPTION – Available Now	Bristol (BX-Series)	21-22
	Britney (BXV-Series)	23-24
	Cambridge (C-Series)	25-26
	Charlotte (CX-Series)	27-28
	Dalton (D-Series)	29-30
	Elevation (E-Series)	31-32
	Elegance (E200-Series) previously named: E2	33-34
	Eastland (E300-Series) previously named: E3	35-36
NEW –Available Now	Erwin (ER200) – NEW	39-40
NEW –Available Now	Erie (ER300) – NEW	41-42
NEW –Available Now	Ericson (ER400) – NEW	43-44
NEW –Available Now	Erdahl (ER500) – NEW	45-46
NEW –Available Now	Ernston (ER600) – NEW	47-48
	Fanfare (FX200-Series) previously named: FX2	49-50
	Foxcote (FX300-Series) previously named: FX	51-53
	Georgetown (G-Series)	55-56
	Thompson (GT-Series) previously named: T	57-58
	Hartford (H-Series)	59-60
	Huntington (H2-Series)	61-62
	Island (I-Series)	63-64
	Jacksonville (J-Series)	65-66
	Kingston (K200-Series) – NEW	67-68
	Kilgore (K300-Series) - NEW	69-70
	Lexington (L-Series)	71-72
	Lincoln (L2-Series)	73-74
	Madison (M-Series)	75-76
	Naples (N-Series)	77-78
	Plymouth (P-Series)	79-80
	Quebec (Q-Series)	81-82
NEW –Available Now	Saddlebrook (SB100-Series) – NEW	83-84
	Springfield (S-Series)	85-86
NEW – Available September 2025	Victoria (VX-Series)	87-88
	Washington (W-Series)	89-90
	Xavier (X-Series)	91-92
	Zenith (Z200)	93-94

FAQ

COMMON QUESTIONS

BUILDING CODES - Each municipality has their own building codes. Those codes will supersede any recommendations made in this catalog. Please refer building code questions to your local inspector since they will be responsible for the interpretation of the code.

FINISHING – Stanisci Design does not offer any finishing, and are sanded to 180 grit. Hoods can be drop-shipped into the kitchen dealer or cabinet manufacturer you have specified.

PANELS – When ordering a hood with a door – you can pick any of the Framing Bead choices with any of the Panel Raises. For example: a shaker style door would be #445 / Flat #1997. See FAQ Page for available profile choices.

MOLDINGS – Many hood designs are available with several different molding styles: #1 Classical, #2 Simple or #3 Basic. Molding is along the base of hood – not the top crown. Top crown is supplied in field.

HOOD HEIGHT – Stanisci hoods should be mounted a minimum of 30" above the cooking surface (or 66" from the floor) unless the range manufacturer specifies more distance is needed.

CUSTOM SIZES – Stanisci hoods are built-to-order based on your specifications. Each hood series is offered in a range of standard sizes, or you can select an in-between size (custom widths may require an additional fillers charge).

PAINT GRADE – When choosing Paint Grade – please review specifications on the FAQ page for Paint Grade Materials. This information page will detail hood body construction and use of Hybrid Doors for this species. Maple is a stain grade species and **not** intended for painted applications. Finish issues related to painting Maple are not warrantable.

RENDERINGS - Libraries are available for most rendering software. See 'Rendering Software Libraries' of our website to download latest 2020 library, and instructions for accessing AutoKitchen and ProKitchen libraries. For other rendering software, please reach out to us for information.

MODIFICATIONS & ACCESSORIES – Please review the Modifications & Accessories section to see available options such as various Removable Options, Wood Battens, Sorrento Spice Racks and Corbel offerings.

VENTILATION OPTIONS - We have standard liners, Stainless Mesh and Stainless Baffle liners from 300-1200 cfm. We can also custom design hoods around most customer supplied vents.

LEAD TIMES – Lead times range from 2 weeks for straight hoods, and 3 weeks for hoods with curve(s) and/or door panels. Lead times do not include shipping.

SHIPPING/ FREIGHT- Wood hoods ship LTL Freight in re-enforced crates, and any ventilation will be strapped to the top. Ventilation that ships separate from the wood hood is shipped Ground or LTL Freight. See ventilation specifications pages for specific details

SALES - Stanisci Design hoods are sold wholesale only exclusively to cabinetry professionals. Retail customers are welcome to reach out to us for questions, however we will not discuss pricing and order details.


TSCA / CARB - Our hoods are TSCA /CARB compliant and will come with all appropriate labels.

FAQ

Materials & Construction

Stanisci Design uses only the finest materials. Range hoods often become the focal point of the kitchen. All solid wood components are hand selected for color. All Stanisci Design Products are TSCA (C.A.R.B) compliant. Hoods are sanded to 180 grit, ready to be finished.

¾" plywood back stretchers.
All structural parts are ¾" plywood

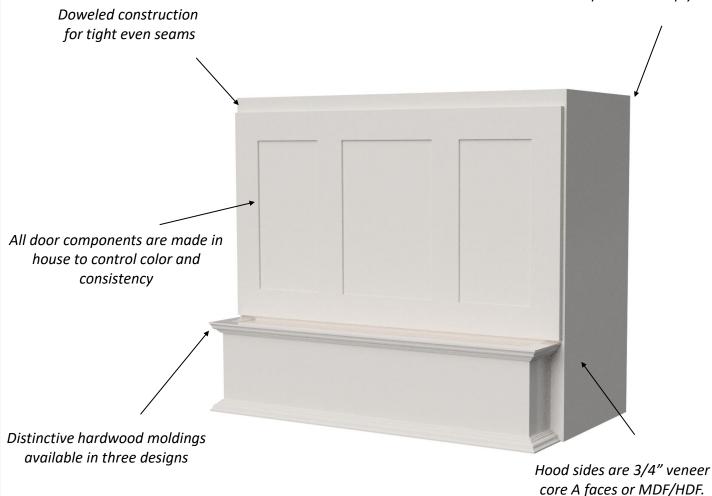







FAQ

Wood Species

Paint Grade Materials

The specifications below will provide information and define our Paint Grade species offering. This material selection is made from the best products available in the market and will give you superior results when painting.

Hybrid Hood – Paint Grade will be constructed using for the body of the hood, 1/2" thick MDF or HDF with no veneer thus providing a smooth surface to paint. We are also utilizing a 3/4" thick plywood with an 1/8" HDF (high density fiber) outer layer, commonly referred to as a Combi Core. Both materials present a smooth surface to finish and are considered the best materials on the market for painting. All molding and hardwood pieces will continue to be Paint Grade Hard Maple. All structural parts will continue to be 3/4" thick veneer core plywood.

Superior Surface for curved hoods – We use a bendable material exclusively designed for painting on all our curved hoods. This material is referred to as Superior Surface. It will be used on the curved section of the hood. This is a paintable man-made material which is impregnated with resin. This is a proprietary material which we have worked with our suppliers to develop for our curved hoods. It is very smooth, stable and has great adhesion.

Hybrid Doors – Doors will be constructed with a Paint Grade Hard Maple frame and MDF panels – raised or flat panels. Hybrid center panels have been tested extensively in the market and have proven to be effective in providing a more durable and superior product for painting. The machining on the hybrid MDF panel profiles is just as precise and clean cut as with solid wood panels. The Hybrid MDF panel provides a more stable product that does not expand and contract like a solid wood center panel. The elimination of center panel shrinking virtually eliminates raw material showing along the outside of a center panel as the seasons change. Eliminating expansion of the center panel also helps to reduce hairline cracks that may develop in the mortise and tenon joint of the door framing.

Paint Grade:

Hood/Cabinet Sides: 3/4" thick Combi Core Plywood

Mitered Portions: 1/2" thick MDF/HDF

Curved Sections: Superior Surface



FAQ

Wood Species Cont.

Maple is hard and heavy with good strength properties, in particular it's high resistance to abrasion and wear. The raw wood color ranges from near white to a dark reddish brown. The wood has a close fine texture and is generally straight grained. Maple is stain grade Maple & <u>not</u> intended for Painted Applications. Finish issues related to painting Maple are not warrantable. Please use Paint Grade for all painted applications.

Alder is extremely soft hardwood of medium density. Colors range from light brown with a yellow tinge to light brown with a reddish tinge. Alder is fairly straight grained with a uniform texture. This wood may have pin knots and mineral streaks. Mineral streaks and other natural variations help create the personality of this product. **Rustic Alder** material will allow for varying size knots & other sound characteristics including mineral streaks. Both sapwood & heartwood can be present in varying amounts. Rustic Alder veneers will contain knots / voids which expose the backing material of the veneer. The adhesive from the veneer being applied to the backer will seal the face of the backing material, finish will typically not adhere. This should be considered when finishing.

Hickory is a very hard, very heavy and dense hardwood which demonstrates extreme variations in color from nearly white to dark brown. Grain patterns can be bold and prominent with irregular characteristics that are associated with tree growth. Burls, water stains, mineral streaks and sound knots are typical and are not considered defects.

Cherry is considered a medium density wood with moderate weight and strength. The heartwood of cherry ranges from light to dark reddish brown while the sapwood may be near white. The heartwood darkens with age and light exposure, this change can be dramatic. Cherry has a fine and uniform grain pattern with a smooth texture. Acceptable characteristics include brown flecks, natural gum pockets, mineral streaks and pin knots.

Walnut is an exceptionally beautiful and stable hardwood whose traits are strongly defined throughout the history of woodworking. Grain patterns range from straight to varied; providing striking depth when finished in natural tones. This specie's coloration fluctuates from dark brown to a purplish black.

Plain Sawn White Oak is White Oak lumber is characterized by uneven cathedral grain that would be similar in appearance to Red Oak grain patterns. Plain Sawn White Oak however has a neutral light to medium brown color sometimes with an olive hue. Known for strength and durability.



Quarter Sawn White Oak is cut radially (90-degree angle from the growth rings) instead of with the grain and produces vertical and uniform grain lines that are straight, tight and run the length of the board, sometimes creating prominent ray flecks. Structural benefits include that it reduces twisting, warping and cupping, holds finishes better, and does not allow liquids to readily pass through it.



Rift Sawn White Oak is specifically cut White Oak lumber where logs are quartered, then sliced perpendicular to the growth rings of the tree. The resulting grain pattern is relatively straight, but the spacing between the grain will vary. This specie will have the normal color range of other White Oak variations, but the method of cutting eliminates cathedral grain, but allows limited amounts of mineral and pin knots to be present.



Red Oak / Quarter Sawn Red Oak is a hard, heavy wood which results in great wear resistance. Color ranges from white to light brown to a pinkish reddish brown. Red Oak will be plain sliced, Quarter Sawn Red Oak will be quarter sawn cut.


FAQ

Base Styles Offered

See hood series page for details.


Standard Base	PL Base #3 Basic	HW Base
RS Base		RSS Base
RA Base		DP2 Base
SL Base		DP1 Base

METAL BAFFLE BASE – available in 17 different finishes (see vent section for details)




FAQ

Base Moldings Offered

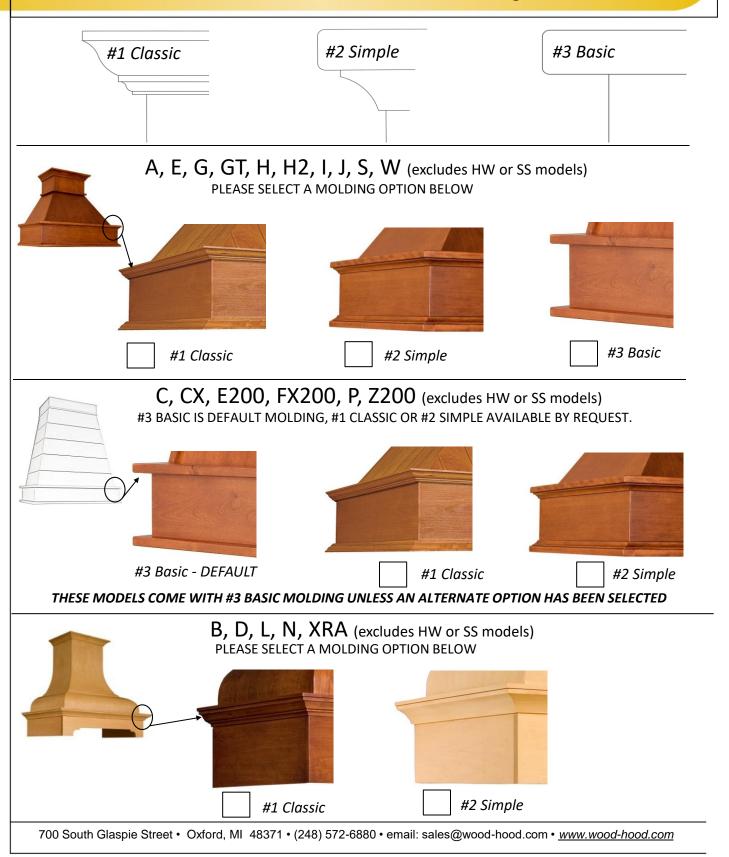

FAQ

Framing Bead and Panel Raises

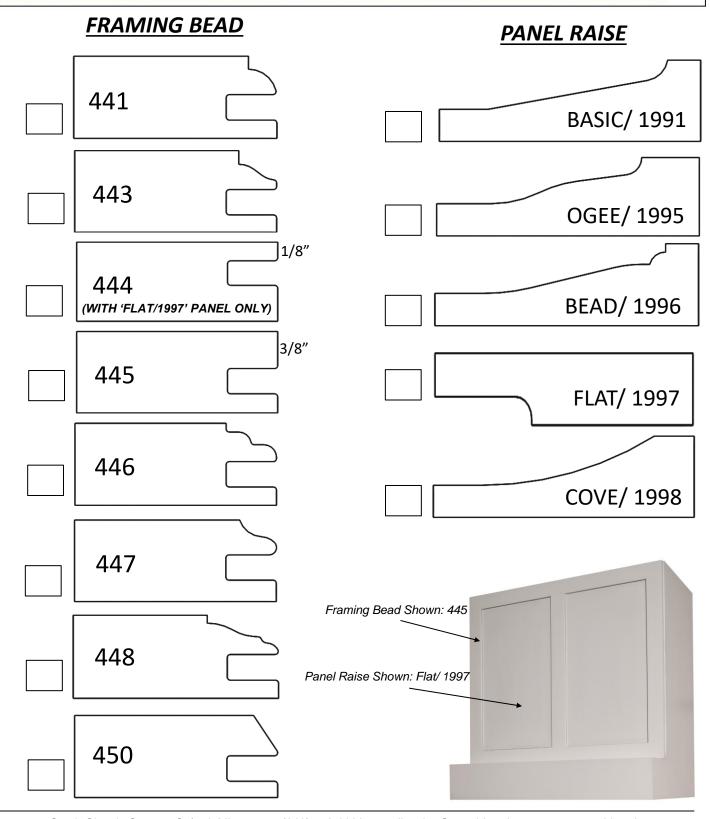

FAQ

Free-Standing vs. In-Series

FREE – STANDING HOODS

Free-standing range hoods are mounted to the wall above the cooking surface, and stand alone from any adjacent cabinetry. These hoods will not have flush sides, and typically have design elements or decorative accents that prohibit a cabinet from being installed flush against the sides.



FREE-STANDING MODELS: AX, B, BXHW, C, CX, D, E, E200, ER200, ER600, FX200, G, GT, K200, VX

IN-SERIES HOODS

In-Series hoods are mounted to the wall above the cooking surface, and have completely flush sides. Moldings and decorative accents will not extend past the sides. This allows cabinetry to be installed on either side of the range hood to achieve a continuous design, but can also be used in a stand-alone design.



IN-SERIES MODELS: A, BXD, BX, E300, ER300, ER400, ER500, FX300, J, K300, L2, M, N, P, Q, S, SB100, W, XRA, Z200


STANISCI ALLMERY

ONLINE QUOTING SYSTEM NOW AVAILABLE!

LINKS TO CREATE A NEW ACCOUNT AND ACCESS A FULL LIBRARY OF HELP VIDEOS ARE LOCATED AT THE TOP OF THE WOOD-HOOD.COM WEBSITE



Training Videos




Axton - AX Series (Free-Standing)



Ashland - A Series (In-Series)




Birmingham - B Series (Free-Standing)



Bristol - BX Series (Free-Standing)



Cambridge - C Series (Free-Standing)



Charlotte - CX Series (Free-Standing)




Dalton - D Series (Free-Standing)



Elevation - E Series (Free-Standing)




(Free-Standing)




Elegance - E200 Series Eastland - E300 Series (In-Series)




Erwin - ER200 Series (Free-Standing)



Erie - ER300 Series (In-Series)



Ericson - ER400 Series (In-Series)




(In-Series)



Erdahl - ER500 Series Ernston - ER600 Series (Free-Standing)



Fanfare - FX200 Series (Free-Standing)



Foxcote - FX300 Series (In-Series)



Georgetown – G Series (Free-Standing)



Thompson - GT Series (Free-Standing)



Hartford - H Series (In-Series)

QUESTIONS? THE STANISCI DESIGN TEAM IS HERE!

EMAIL US AT SALES@WOOD-HOOD.COM OR USE OUR NEW ONLINE CHAT AVAILABLE THROUGH THE ALLMOXY QUOTING SYSTEM.



Got any questions? I'm happy to help. Please provide your name and company



 \otimes

TFL PROGRAM PREVIEW (THERMALLY FUSED LAMINATE)

AVAILABLE IN 16 FINISHES



NEW

Please review our
Exclusive TFL spec book
for information specifically
related to these unique
products and offerings

SUMMER 2025



MORE FROM WOOD.

WHAT ARE THERMALLY FUSED LAMINATES (TFL)?

Thermally fused laminate (TFL) is manufactured with enhanced visual and performance characteristics. Surface textures are created with steel press plates that emboss the decorative overlay to heighten the realism of wood grain. TFL has excellent scratch and wear resistance. Due to the performance, design flexibility, and cost advantages, TFL offers an excellent option for designers. TFL is made by fusing a resinimpregnated décor paper sheet directly to a substrate. Heat and pressure activate the resin in the saturated décor paper, creating a cross-linked bond with the substrate. This process fuses the décor paper to the substrate.

TFL creates a look and feel that is almost indistinguishable from solid wood or veneer. Ideal for hard-wearing or heavy-duty applications. TFL is durable, long lasting and easy to maintain. The TFL product is considered a green and environmentally friendly product. Information can be found at www.egger.com/ecofacts

WHAT IS THE LEAD TIME ON A TFL HOOD?


Once your order is submitted and a sample has been approved, you can expect your order to ship to you in approximately 4 weeks.

HOW DO I REQUEST SAMPLES?

You can request a complete set of 4 x 6" TFL samples in all 16 finishes under the 'Samples' section in our online quoting system, or by emailing us at sales@wood-hood.com. The complete set of samples cost \$97 and will be credited back to you on your first TFL order.

Axton - AX Series

Free Standing

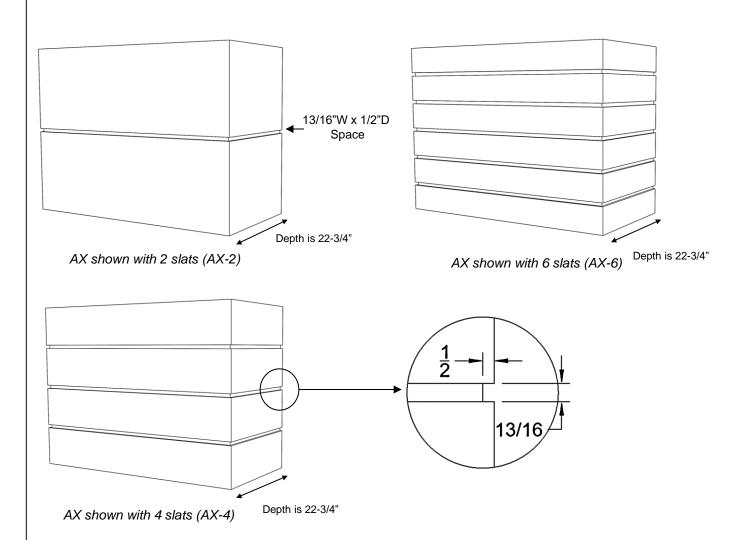


AX Series		
Standard Widths	31, 37, 43, 49, 55, 61 (Reduced widths available) *Minimum Width 31"	
Standard Heights	24, 30, 36, 42, 48 (Reduced heights available)	
Removable Options	Not Available	
Standard assumptions	Slat spacing is 13/16" (designed to yield 3/4" W x 1/2" D space after finish applied.) All slats will be equal height Average weight could exceed 100 pounds. Hood must be properly anchored to the wall	
Ventilation	Hood must be a minimum of 1" wider than available vent width. Example: To use a 36" vent model, the hood should be a minimum of 37" wide	
Grain Direction	Horizontal	

Axton - AX Series


Free Standing


Standard Heights: 24, 30, 36, 42, 48

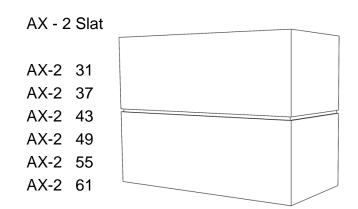

AX-3 31 AX-3 37 AX-3 43 AX-3 49 AX-3 55 AX-3 61


AX - 3 Slat




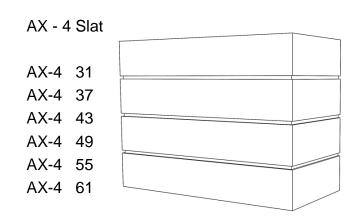

AX-5 31 AX-5 37 AX-5 43 AX-5 49 AX-5 55 AX-5 61


AX - 5 Slat



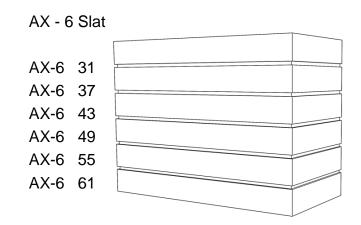

Ashland - A Series

In-Series

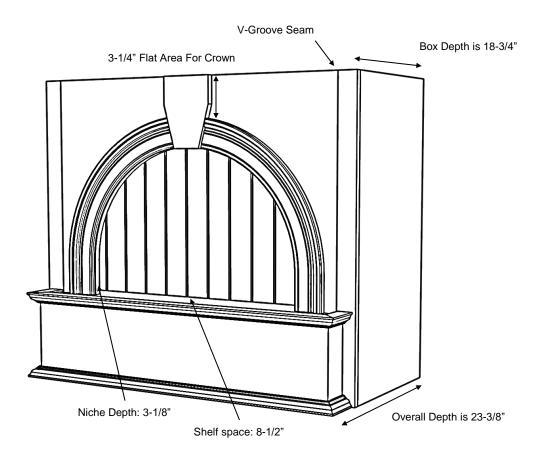

A Series shown with Standard Base (A) and #1 Classic moldings


A Series		
Standard Widths	33, 36, 39, 42, 45, 48, 51, 54, 57, 60, 63(Reduced widths available)	
Standard Heights	30, 36, 42, 48 (Reduced heights available)	
Removable Options	Removable Panel is standard (Two seams in beading to allow for access) Non-bead panel by request – will not be removable (NBNA) - see modifications section.	
Ventilation	Hood must be a minimum of 3" wider than available vent width. Example: To use a 36" vent model, the hood should be a minimum of 39" wide.	
Available Moldings Grain Direction	#1 Classic, #2 Simple, #3 Basic Vertical (Base is horizontal)	

Ashland - A Series


In-Series

Standard Heights: 30, 36, 42, 48


A- Standard Base



A- RS Base



A- RSS Base




A- RA Base







A- DP2 Base



A-SL Base




A- DP1 Base






Birmingham - B Series


Free Standing

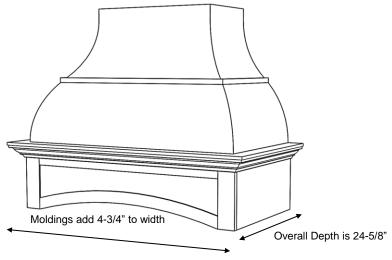



B Series shown with DP2 Base (BDP2) and #1 Classic moldings

B Series shown with Hardwood Base (BHW)

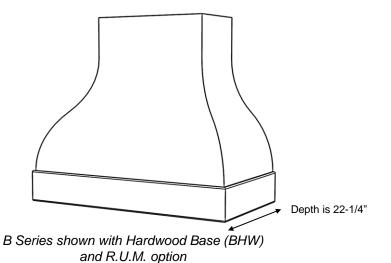


_	_	_	
	C	۱ri	es
L	OC	7 I I	てつ

Standard Widths	36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 36"
Standard Heights	30, 36, 42, 48 (Reduced heights available)
Removable Options	Removable Top (RT) – see modifications section.
Available Options	Remove Upper Molding - request R.U.M. option
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide.
Available Moldings	#1 Classic, #2 Simple
Grain Direction	Vertical (Base is horizontal)

Birmingham - B Series

Free Standing

Standard Heights: 30, 36, 42, 48

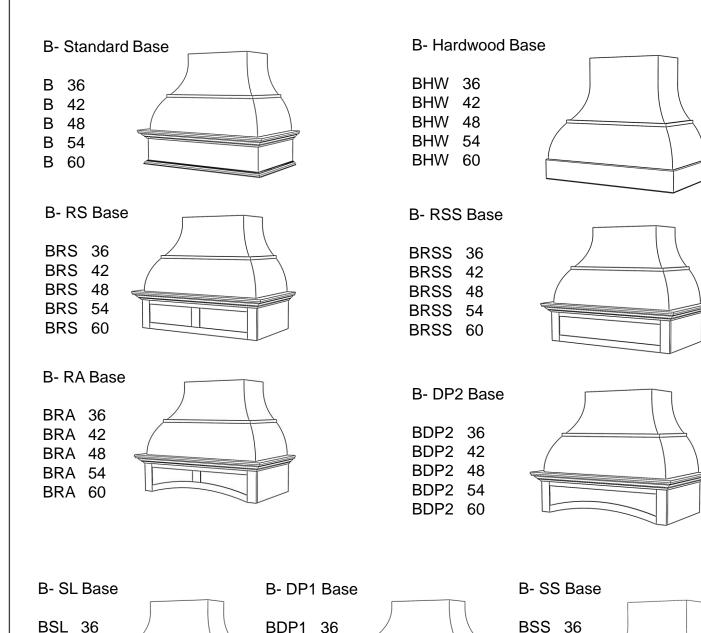

700 South Glaspie Street • Oxford, MI 48371 • (248) 572-6880 • email: sales@wood-hood.com • www.wood-hood.com

BDP1 42

BDP1 48

54

60

BDP1

BDP1

BSL 42

BSL 48

BSL 54

BSL 60

BSS 42 BSS 48


BSS 60

54


BSS

Bedford - BXD Series


Free Standing



BXD Series (BXD)
(30" – 42" wide will have 2 center panels)



BXD Series shown with Stainless Steel Base (BXDSS) (48" – 60" wide will have 3 center panels)

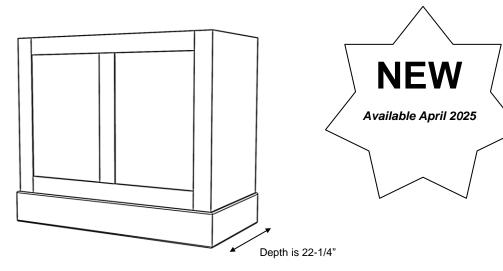

BXD Series shown with hardwood base (BXDHW) (30" – 42" wide will have 2 center panels)

BXD Series			
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"		
Standard Heights	24, 30, 36, 42, 48 (Reduced heights available)		
Removable Options	Removable Top (RT) available on BXDHW only- see modifications section.		
Ventilation	Hood will be same width as available vent width.		
	Example: To use a 36" vent model, the hood should be a minimum of 36" wide		
Grain Direction	Vertical (Base is horizontal)		

Bedford - BXD Series

Free Standing

Standard Heights: 24, 30, 36, 42, 48

BXD - Standard Hood

BXD 30 BXD 36 BXD 42 BXD 48*


BXD 54* BXD 60*



BXDHW - Hardwood Base


BXDHW 30 BXDHW 36 BXDHW 42 BXDHW 48* BXDHW 54*

BXDHW 60*



BXDSS - SS Base

BXDSS 30 BXDSS 36 BXDSS 42 BXDSS 48* BXDSS 54* BXDSS 60*




^{*} There will be three panels rather than two, due to width of hood


Bristol - BX Series

HORIZONTAL GRAIN


Free Standing




Standard BX Series (BX)

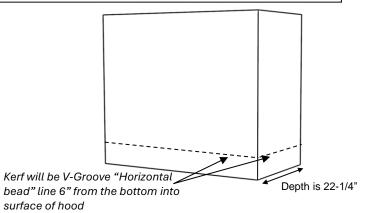

BX Series shown with Kerf Cut (BX-KCUT)



Close up of V-groove "Horizontal bead" option, Same V-Groove used for Kerf Cut (KCUT)



BX Series shown with Horizontal Beading and Stainless Steel Base (BXHBSS)


BX Series			
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"		
Standard Heights	24, 30, 36, 42, 48 (Reduced heights available)		
Removable Options	Removable Top (RT) available on BXHW or BXHWHB only– see modifications section.		
Standard Assumptions	Kerf Cut (KCUT)– assumed placement is 6" from bottom		
Available Options	Applied Molding Wrap – BX and BXHB only (See options page) Applied Hardwood Wrap (See options page)		
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide		
Grain Direction	Horizontal		

Bristol - BX Series


Free Standing

Standard Heights: 24, 30, 36, 42, 48

BX- Standard Hood




BX- Horizontal Beading




24" tall: 3 beads (4 sections) 30-36" tall: 4 beads (5 sections) 42-48" tall: 5 beads (6 sections)

BX- Hardwood Base




BX- Hardwood Base, Horizontal Beading




24-30" tall: 3 beads (4 sections) 36-42" tall: 4 beads (5 sections) 48" tall: 5 beads (6 sections)

BX-SS Base





BX- SS Base, Horizontal Beading



24-30" tall: 3 beads (4 sections) 36-42" tall: 4 beads (5 sections) 48" tall: 5 beads (6 sections)


BX- Kerf Cut






Britney - BXV Series VERTICAL GRAIN


Free Standing





Standard BXV Series (BXV)

BX Series shown with Hardwood Base (BXVHW)




BXV Series shown with Stainless Steel Base (BXVSS)

BXV Series		
Standard Widths	30, 36, 42, 48 (Reduced widths available) *Minimum Width 30"	
Standard Heights	24, 30, 36, 42, 48, 54, 60 (Reduced heights available)	
Removable Options	Removable Top (RT) is available on BXVHW only – see modifications section.	
Available Options	Applied Molding wrap – BXV only (See options page) Applied Hardwood Wrap – BXV only (See options page)	
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide	
Grain Direction	Vertical (Base is Horizontal)	

Britney - BXV Series

Free Standing

Standard Heights: 24, 30, 36, 42, 48, 54, 60



BXV 30

BXV 36

BXV 42

BXV 48



BXVHW 30

BXVHW 36

BXVHW 42

BXVHW 48





BXVSS 30

BXVSS 36

BXVSS 42


BXVSS 48






Cambridge - C Series


Free Standing

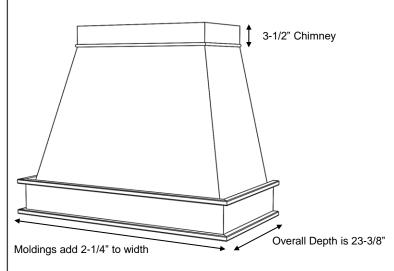

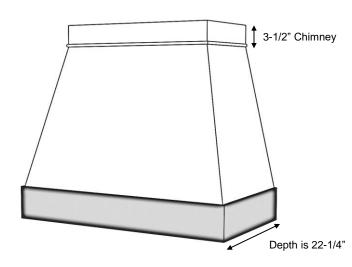

C Series shown with PL Base (CPL) and #3 Basic moldings

C Series shown with Stainless Steel Base (CSS)



Close up of V-groove "Horizontal bead" option

C Series shown with HW Base (CHWHB) and Horizontal Beading

	С	Series
Standard Widths	30, 36, 42, 48, 54, 60 (Reduc	ed widths available) *Minimum Width 30"
Standard Heights	24, 30, 36, 42, 48, 54 (Reduc	ed heights available)
Removable Options	Removable Top (RT) – see m Applied Removable Panel (A	nodifications section. RP) – see modifications section.
Ventilation	Hood will be same width as a Example: To use a 36" vent r	vailable vent width. nodel, the hood should be a minimum of 36" wide
Available Moldings	#3 Basic is standard.	#1 Classic or #2 Simple available upon request. Base molding only, chimney molding does not change.
Grain Direction	Horizontal Vertical grain available on a c	custom quote basis

Cambridge - C Series

Free Standing

Standard Heights: 24, 30, 36, 42, 48, 54

C- Hardwood Base

CHW	30	
CHW	36	\
CHW	42	\
CHW	48	
CHW	54	
CHW	60	


C-PL Base

CPL	30	
CPL	36	
CPL	42	/
CPL	48	
CPL	54	
CPL	60	

C-SL Base

CSL 60

C-SS Base




C-Hardwood Base, Horizontal Beading *

CHWHB	30	
CHWHB	36	
CHWHB	42	
CHWHB	48	
CHWHB	54	
CHWHB	60	


C- PL Base, Horizontal Beading *

CPLHB CPLHB		
CPLHB	42	
CPLHB	48	
CPLHB	54	
CPLHB	60	

C- SL Base, Horizontal Beading *



C- SS Base, Horizontal Beading *





* # of Beads

24" tall: 2 beads (3 sections) 30-36" tall: 3 beads (4 sections) 42" tall: 4 beads (5 sections) 48"-54" tall: 5 beads (6 sections)

Charlotte - CX Series


Free Standing



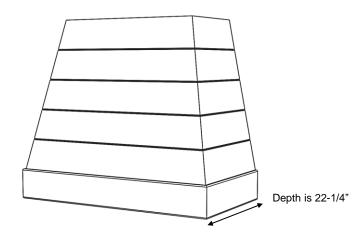

CX Series shown with Hardwood Base (CXHW)

CX Series shown with SL Base (CXSL) and #3 Basic moldings

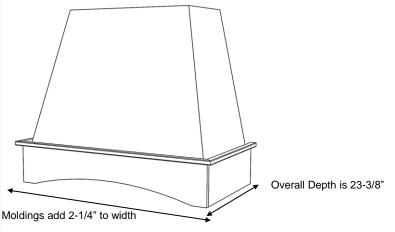

CX Series shown with Hardwood Base and Horizontal Beading (CXHWHB)

Close up of V-groove "Horizontal bead" option

CX Series		
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"	
Standard Heights	24, 30, 36, 42, 48 (Reduced heights available)	
Removable Options	Removable Top (RT) – see modifications section. Applied Removable Panel (ARP) – see modifications section.	
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide.	
Available Moldings	#3 Basic is standard #1 Classic or #2 Simple available upon request	
Grain Direction	Horizontal Vertical grain available on a custom quote basis	

Charlotte - CX Series

Free Standing

Standard Heights: 24, 30, 36, 42, 48


CX- Hardwood Base

CXHW	30	
CXHW	36	
CXHW	42	
CXHW	48	
CXHW	54	
CXHW	60	


CX-PL Base

CXPL	30	
CXPL	36	/
CXPL	42	/
CXPL	48	
CXPL	54	
CXPL	60	

CX-SL Base



CX-SS Base



CX- Hardwood Base, Horizontal Beading *

CXHWHB CXHWHB CXHWHB CXHWHB CXHWHB	36 42 48 54	
CXHWHB	60	

CX- PL Base, Horizontal Beading *

CXPLHB	30	
CXPLHB	36	
CXPLHB	42	
CXPLHB	48	
CXPLHB	54	
CXPLHB	60	

CX- SL Base, Horizontal Beading *

CXSLHB CXSLHB CXSLHB CXSLHB CXSLHB CXSLHB	36 42 48 54	
CXSLHB	60	

CX- SS Base, Horizontal Beading *


	,	5
CXSSHB	30	
CXSSHB	36	
CXSSHB	42	
CXSSHB	48	
CXSSHB	54	
CXSSHB	60	
*# 0	f Boads	

of Beads

24-30" tall: 3 beads (4 sections) 36-42" tall: 4 beads (5 sections) 48" tall: 5 beads (6 sections)

Dalton - D Series

Free Standing

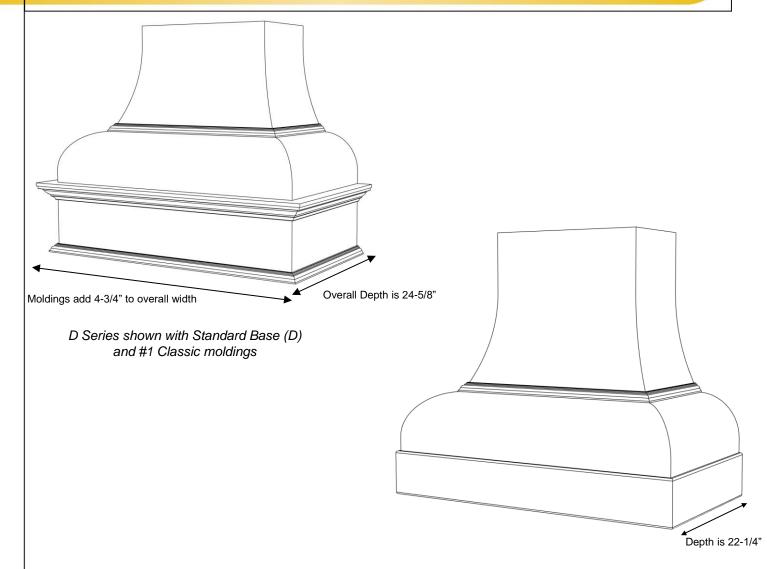


D Series shown with Hardwood Base (DHW)

D Series				
Standard Widths	36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 36"			
Standard Heights	30, 36, 42, 48 (Reduced heights available)			
Removable Options	Not available			
Ventilation	Hood will be same width as available vent width.			
	Example: To use a 36" vent model, the hood should be a minimum of 36" wide			
Available Moldings	#1 Classic, #2 Simple			
Grain Direction	Vertical (Base is horizontal)			

Dalton - D Series


Free Standing


Standard Heights: 30, 36, 42, 48

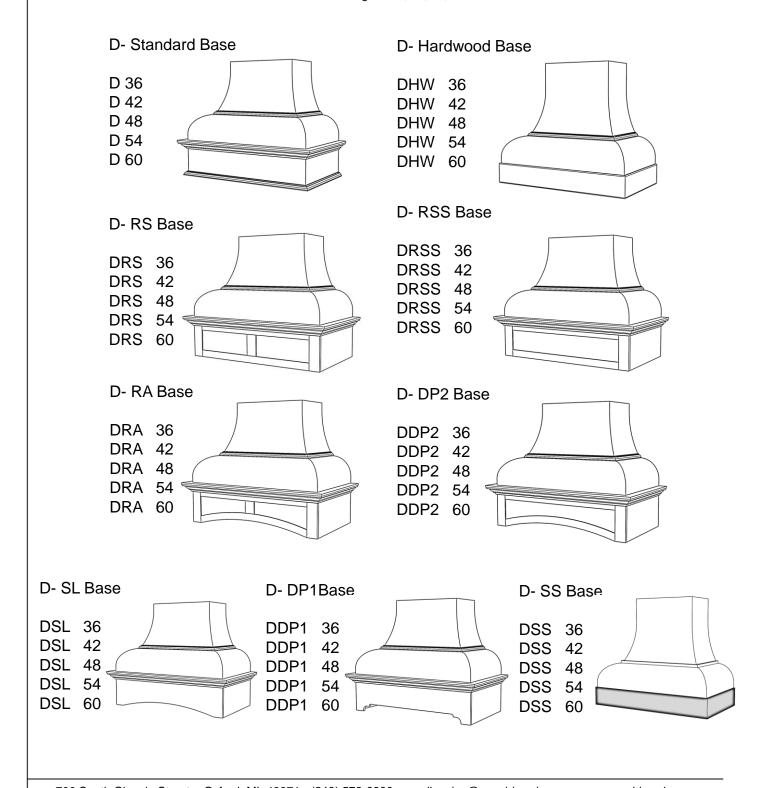

Elevation - E Series

Free Standing

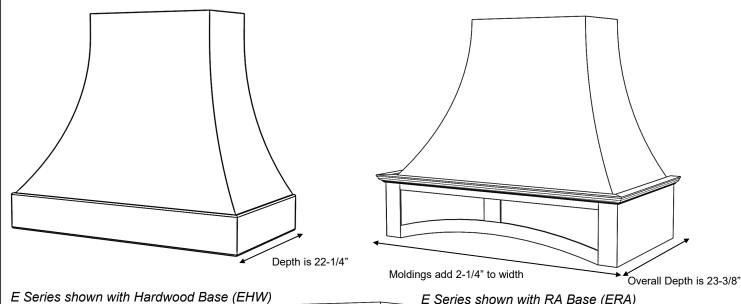

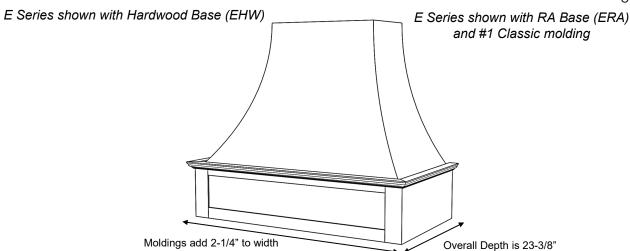

E Series shown with RSS Base (ERSS) and #1 Classic molding

E Series		
Standard Widths	36, 42, 48, 54, 60 (Reduced widths available)	
Standard Heights	30, 36, 42, 48 (Reduced heights available)	
Removable Options	Removable Top (RT) – see modifications section.	
Available Options	Hardwood Battens (See batten options page)	
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide	
Available Moldings	#1 Classic, #2 Simple, #3 Basic	
Grain Direction	Vertical (Base is horizontal)	

Elevation - E Series

Free Standing

Standard Heights: 30, 36, 42, 48




E 36E 42E 48E 54E 60



E- Hardwood Base

EHW 42 EHW 48 EHW 54 EHW 60



E-RS Base

ERS 36 ERS 42 ERS 48 ERS 54 ERS 60



E-RSS Base

ERSS 36 ERSS 42 ERSS 48 ERSS 54 ERSS 60



E-RA Base

ERA 36 ERA 42 ERA 48 ERA 54 ERA 60



E- DP2 Base

EDP2 36 EDP2 42 EDP2 48 EDP2 54 EDP2 60



E- SL Base


ESL 36 ESL 42 ESL 48 ESL 54 ESL 60

E- DP1 Base

EDP1 36 EDP1 42 EDP1 48 EDP1 54 EDP1 60

E- SS Base

ESS 36 ESS 42 ESS 48 ESS 54 ESS 60




Previously Named: E2


STANISCI. DESIGN

Elegance - E200 Series


Free Standing



E200 Series shown with Hardwood Base (E200HW)



E200 Series shown with SL Base (E200SL) and #3 Basic moldings

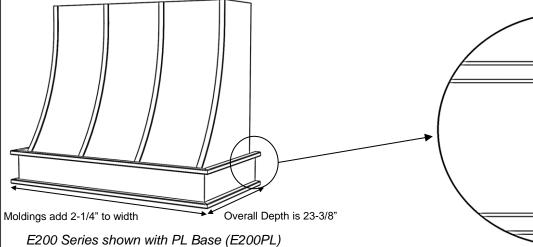

E200 Series shown with PL Base (E200PL) #3 Basic moldings and optional Hardwood Battens


E200 Series		
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"	
Standard Heights	24, 30, 36, 42, 48 (Reduced heights available)	
Removable Options	Removable Top (RT) – see modifications section.	
Available options	Hardwood Battens (See batten options page)	
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide	
Available Moldings	#3 Basic is standard #1 Classic or #2 Simple available upon request	
Grain Direction	Vertical (Base is horizontal)	

Elegance – E200 Series


Free Standing

Standard Heights: 24, 30, 36, 42, 48


E200- PL Base




E200- Hardwood Base




E200-RS Base




E200- RSS Base




E200- RA Base




E200- DP2 Base




E200- SL Base



E200- DP1 Base



E200- SS Base





Previously Named: E3


STANISCI. DESIGN

Eastland - E300 Series

In-Series



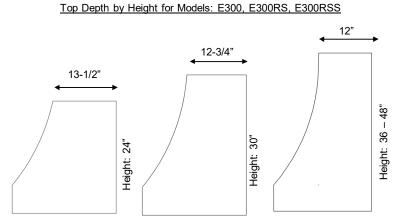

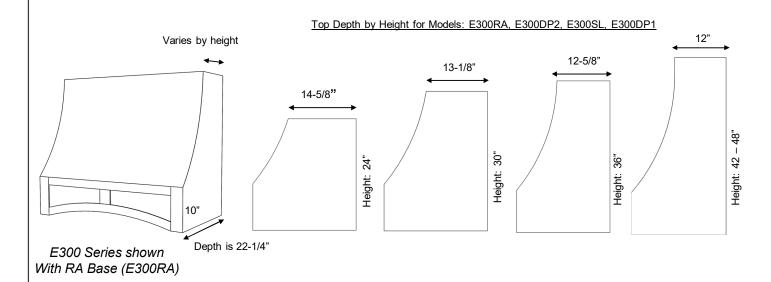

E300 Series		
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"	
Standard Heights	24, 30, 36, 42, 48 (Reduced heights available)	
Removable Options	Not available	
Available Options	Hardwood Battens (See batten options page) Applied Molding wrap (See options page) Applied Hardwood Wrap (See options page)	
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide.	
Grain Direction	Vertical (Front base panel is horizontal, except Standard E300 model will be vertical)	


Previously Named: E3

STANISCI. DESIGN

Eastland - E300 Series

In-Series

Standard Heights: 24, 30, 36, 42, 48





E300RS 30 E300RS 36 E300RS 42 E300RS 48 E300RS 54 E300RS 60

E300-RSS Base

E300RSS 30 E300RSS 36 E300RSS 42 E300RSS 48 E300RSS 54 E300RSS 60

E300-RA Base

E300RA 30 E300RA 36 E300RA 42 E300RA 48 E300RA 54 E300RA 60

E300-DP2 Base

E300DP2 30 E300DP2 36 E300DP2 42 E300DP2 48 E300DP2 54 E300DP2 60

E300-SL Base


E300SL 30 E300SL 36 E300SL 42 E300SL 48 E300SL 54 E300SL 60

E300- DP1 Base


E300DP1 30 E300DP1 36 E300DP1 42 E300DP1 48 E300DP1 54 E300DP1 60

ER Range Hoods


Available in 5 designs









ER300 Series hood (ER300)




ER500 Series hood (ER500) shown with optional battens






ER600 Series hood shown with hardwood base (ER600HW) and optional battens on curved face

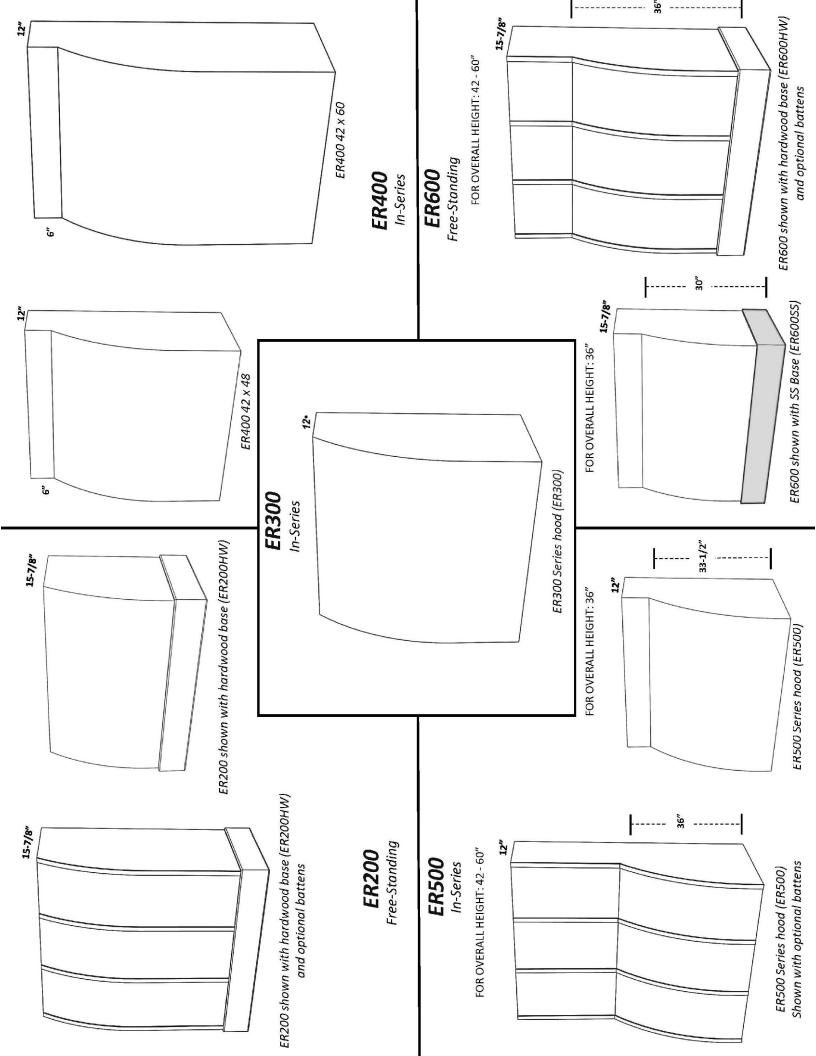

Erwin - ER200 Series

Free Standing

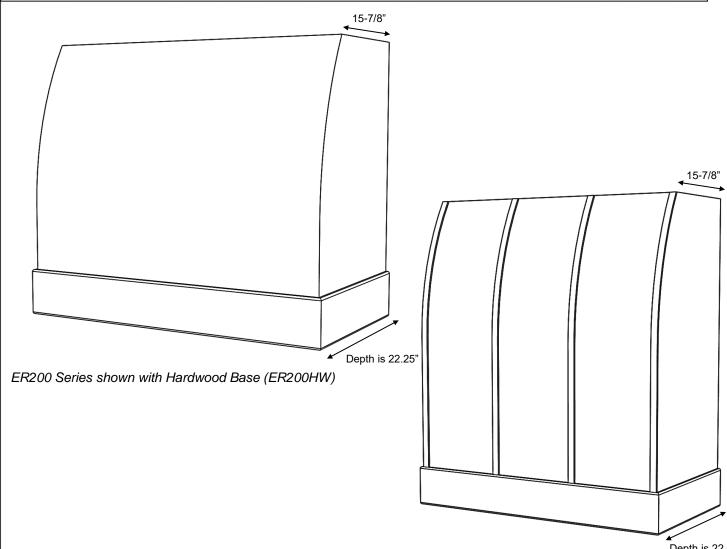

ER200 Series shown with Hardwood Base (ER200HW)
and optional Hardwood Battens

	ER200 Series	
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"	
Standard Heights	30, 36, 42, 48, 54, 60 (Reduced heights available) *Minimum Height 30"	
Removable Options Not available		
Available Options	Hardwood Battens (See batten options page)	
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide.	
Grain Direction	Vertical (base is horizontal)	


Erwin - ER200 Series

Free Standing

Standard Heights: 30, 36, 42, 48, 54, 60


ER200- Hardwood Base

ER200HW 30 ER200HW 36 ER200HW 42 ER200HW 48 ER200HW 54* ER200HW 60*



ER200-SS Base


ER200SS 30 ER200SS 36 ER200SS 42 ER200SS 48 ER200SS 54* ER200SS 60*



^{*} Hoods over 48" Wide have a maximum height of 48".

Erie - ER300 Series

In-Series

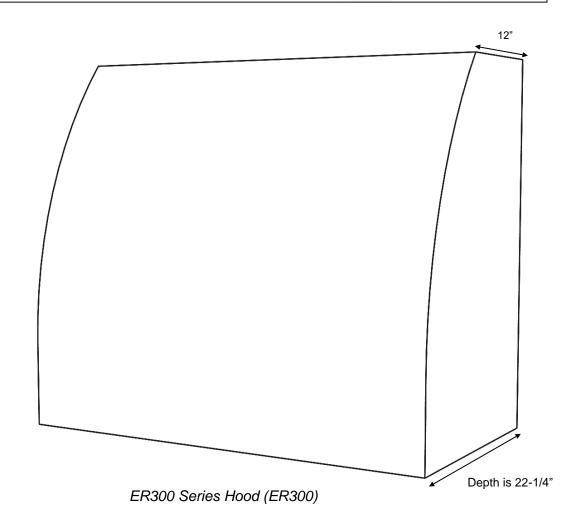


	ER300 Series
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"
Standard Heights	36, 42, 48, 54, 60 (Reduced heights available) *Minimum Height 36"
Removable Options	Not available
Available Options	Hardwood Battens (See batten options page)
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide.
Grain Direction	Vertical

Erie - ER300 Series

In-Series

Standard Heights: 36, 42, 48, 54, 60

ER300 30 ER300 36 ER300 42 ER300 48 ER300 54* ER300 60*

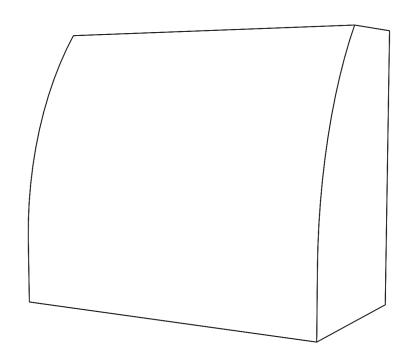


^{*} Hoods over 48" Wide have a maximum height of 42"

Ericson - ER400 Series

In-Series

FOR OVERALL HEIGHTS: 48" - 60"

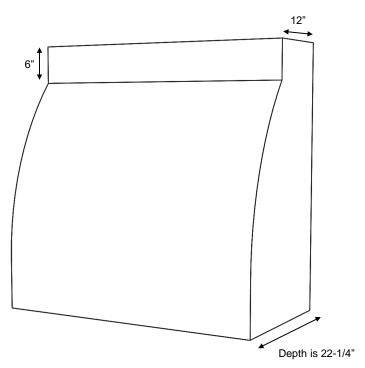

ER400 Series Hood, 42 x 48 (ER400)


	ER400 Series
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"
Standard Heights	48, 54, 60 (Reduced heights available) *Minimum Height 48"
Removable Options	Not available
Available Options	Hardwood Battens (See batten options page)
Ventilation	Hood will be same width as available vent width.
	Example: To use a 36" vent model, the hood should be a minimum of 36" wide.
Grain Direction	Vertical

Ericson - ER400 Series

In- Series

Standard Heights: 48, 54, 60


ER400 30 ER400 36 ER400 42 ER400 48 ER400 54* ER400 60*

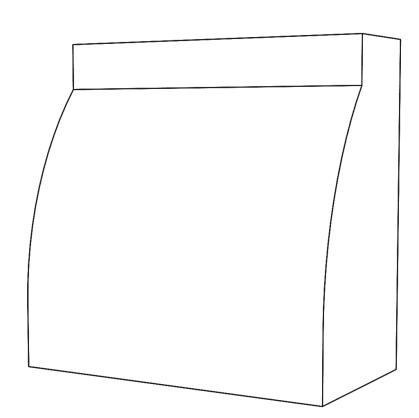

^{*} Hoods over 48" Wide have a maximum height of 48"

Erdahl - ER500 Series

In-Series

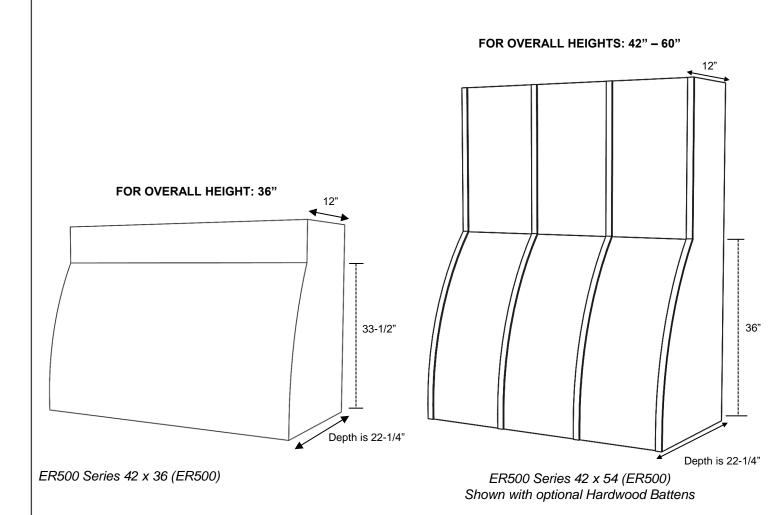


ER500 Series	
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"
Standard Heights	36, 42, 48, 54, 60 (Reduced heights available) *Minimum Height 36"
Removable Options	Not available
Available Options	Hardwood Battens (See batten options page)
Ventilation	Hood will be same width as available vent width.
	Example: To use a 36" vent model, the hood should be a minimum of 36" wide.
Grain Direction	Vertical

Erdahl - ER500 Series

In-Series


Standard Heights: 36, 42, 48, 54, 60

ER500 30 ER500 36 ER500 42 ER500 48 ER500 54 ER500 60

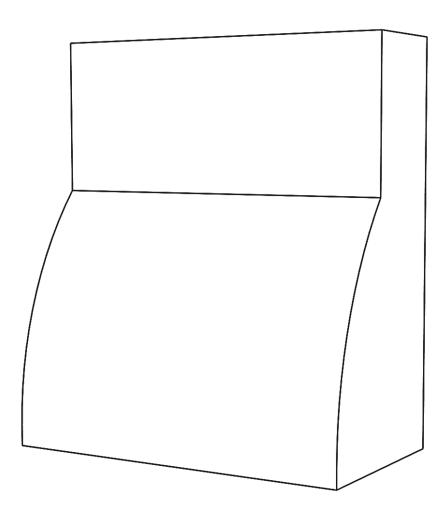

Ernston - ER600 Series

Free Standing

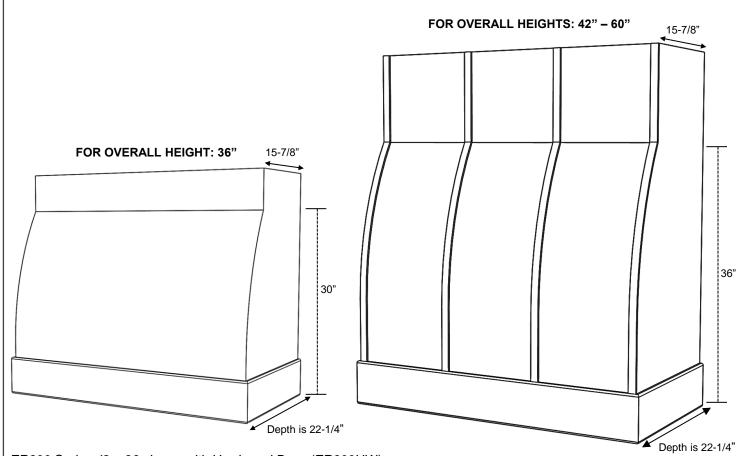

ER600 Series 42 x 36 shown with Hardwood Base (ER600HW)

ER600 Series 42 x 48 shown with Hardwood Base (ER600HW) and optional Hardwood Battens

	ER600 Series
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"
Standard Heights	36, 42, 48, 54, 60 (Reduced heights available) *Minimum Height 36"
Removable Options	Not available
Available Options	Hardwood Battens (See batten options page)
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide.
Grain Direction	Vertical (base is horizontal)


Ernston - ER600 Series

Free Standing

Standard Heights: 36, 42, 48, 54, 60


ER600- Hardwood Base

ER600HW 30 ER600HW 42 ER600HW 48 ER600HW 54 ER600HW 60



ER600-SS Base

ER600SS 30 ER600SS 36 ER600SS 42 ER600SS 48 ER600SS 54 ER600SS 60




Previously Named: FX2

STANISCI. DESIGN

Fanfare - FX200 Series

Free Standing

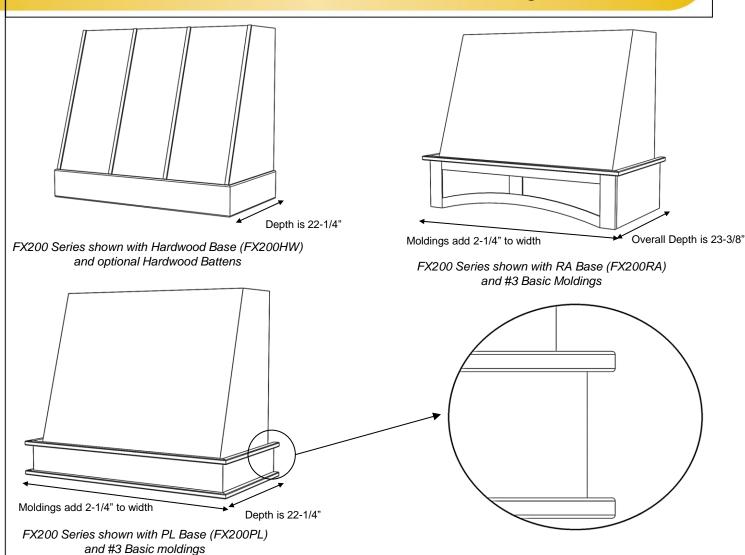


	FX200 Series
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"
Standard Heights	24, 30, 36, 42, 48 (Reduced heights available)
Removable Options	Removable Top (RT) – see modifications section.
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide
Available Moldings	#3 Basic is standard #1 Classic or #2 Simple available upon request
Available Options	Hardwood Battens (See batten options page)
Grain Direction	Vertical (Base is horizontal)

Fanfare - FX200 Series

Free Standing

Standard Heights: 24, 30, 36, 42, 48

FX200- PL Base FX200- Hardwood Base FX200HW 30 FX200PL 30 FX200PL 36 FX200HW 36 FX200PL 42 FX200HW 42 FX200PL 48 FX200HW 48 FX200HW 54 FX200PL 54 FX200PL 60 FX200HW 60 FX200- RS Base FX200- RSS Base FX200RS 30 FX200RSS 30 FX200RS 36 FX200RSS 36 FX200RS 42 FX200RSS 42 FX200RS 48 FX200RSS 48 FX200RSS 54 FX200RS 54 FX200RS 60 FX200RSS 60 FX200- RA Base FX2- DP2 Base FX200RA 30 FX200DP2 30 FX200RA 36 FX200DP2 36 FX200RA 42 FX200DP2 42 FX200RA 48 FX200DP2 48 FX200RA 54 FX200DP2 54 FX200RA 60 FX200DP2 60

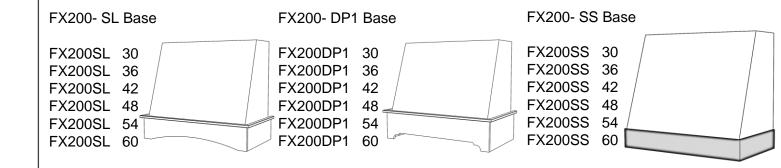


Previously Named: FX

STANISCI. DESIGN

Foxcote - FX300 Series

In-Series

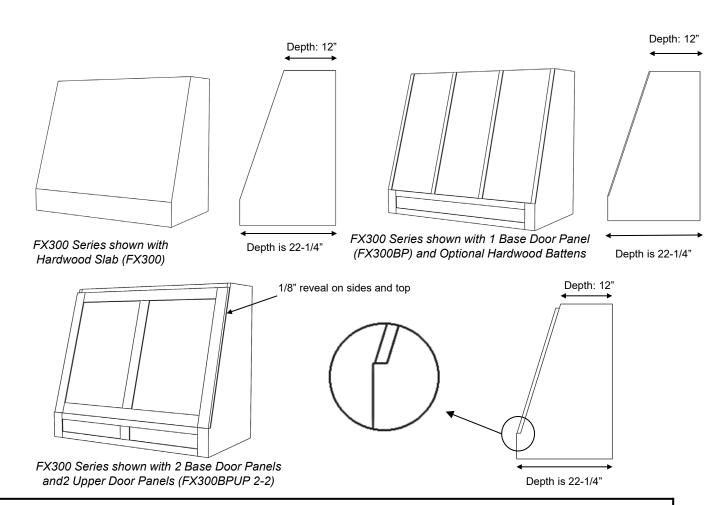

FX300 Series	
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"
Standard Heights	24, 30, 36, 42, 48 (Reduced heights available)
Removable Options	Hoods with an upper door panel option - Removable Panel is standard Hoods without an upper door panel option – No Removable Panel
Available Options	Hardwood Battens (See batten options page) Applied Molding Wrap (See options page) Applied Hardwood Wrap (See options page) 12" Top Depth can be modified by request.
Standard Assumption	Base door panels must be flat.
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide
Grain Direction	Vertical (Base is horizontal) Hoods over 48" wide will have horizontal grain

Previously Named: FX

STANISCI. DESIGN


Foxcote - FX300 Series

In-Series

Standard Widths: 30, 36, 42, 48, 54, 60 Standard Heights: 24, 30, 36, 42, 48


FX300

FX300	
FX300	30
FX300	36
FX300	42
FX300	48
FX300H	54*
FX300H	60*




* Hoods over 48" wide will have horizontal grain on tapered front, sides, and base.

FX300BP

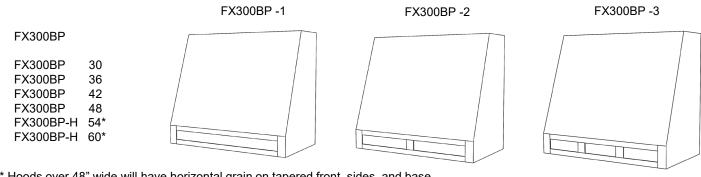

* Hoods over 48" wide will have horizontal grain on tapered front, sides, and base.

FX300UP

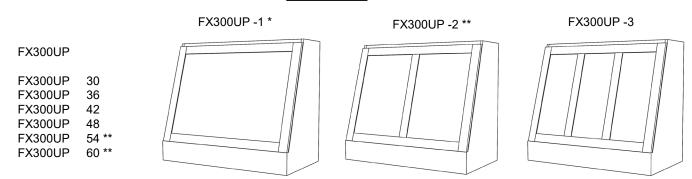


- * In all sizes, 1 upper panel option requires Paint Grade.
- ** Hoods over 48" wide, 2 upper panel option requires Paint Grade.
- ** NOTE: Top Door on FX300 is Fixed when Height is below 24"H

STANISCI Foxcote - FX300 Series


In-Series

Standard Widths: 30, 36, 42, 48, 54, 60 Standard Heights: 24, 30, 36, 42, 48


FX300BPUP 1-1*



FX300BPUP 1-2**




FX300BPUP 1-3




FX300BPUP 2-1*



FX300BPUP 2-2**




FX300BPUP 2-3




FX300BPUP 3-1*



FX300BPUP 3-2**



FX300BPUP 3-3




^{*} In all sizes, 1 upper panel option requires Paint Grade.

^{**} Hoods over 48" wide, 2 upper panel option requires Paint Grade.


^{**} NOTE: Top Door on FX300 is Fixed when Height is below 24"H

STANISCI G vs. GT Chimney Hoods

The G and GT Series hood are identical chimney style hoods however, the G Series is made for a shorter style hood while the GT Series is made for a taller style hood.

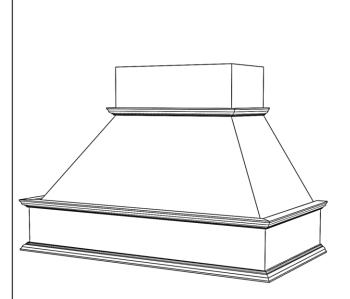

G Series shown with Standard Base 36 x 30




GT Series shown with Standard Base 36 x 42

(GT-Series was previously named T-Series)

Georgetown - G Series

Free Standing

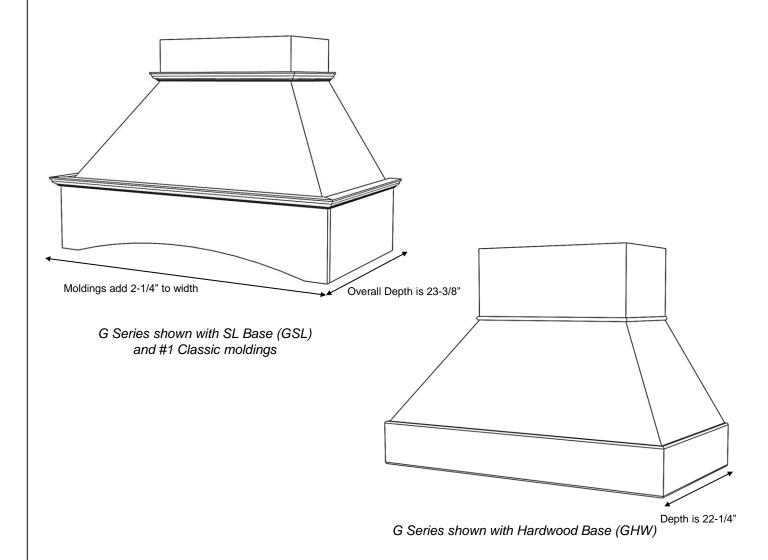


G Series	
Standard Widths	36, 42, 48, 54, 60 (Reduced widths available)
	30 (Modified heights available) Chimney can be trimmed in the field
Removable Options	Removable Top (RT) – see modifications section. Applied Removable Panel (ARP) – see modifications section.
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide
·	#1 Classic, #2 Simple, #3 Basic Vertical (Base is horizontal)

Georgetown - G Series

Free Standing

Standard Height: 30

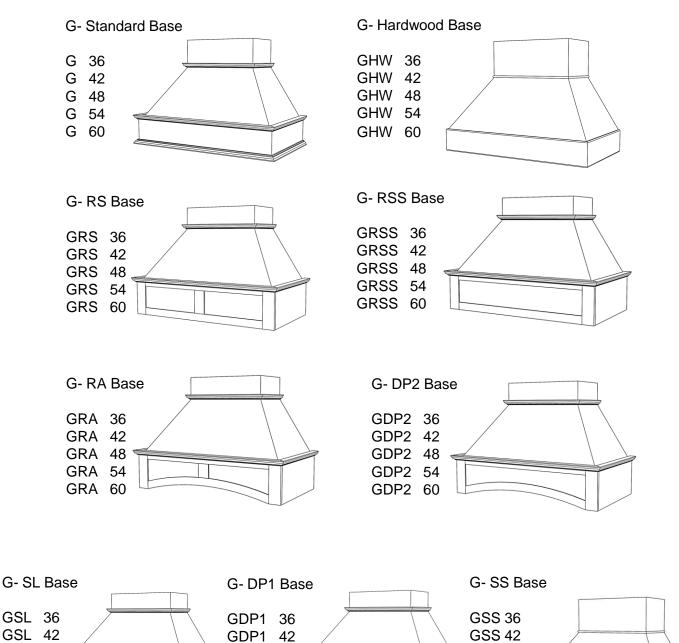

700 South Glaspie Street • Oxford, MI 48371 • (248) 572-6880 • email: sales@wood-hood.com • www.wood-hood.com

GDP1 48

GDP1 54

GDP1 60

GSL 48,

GSL 54

GSL 60

GSS 48

GSS 54

GSS 60


Previously Named: T

STANISCI. DESIGN

Thompson - GT Series

Free Standing

Depth is 22-1/4"

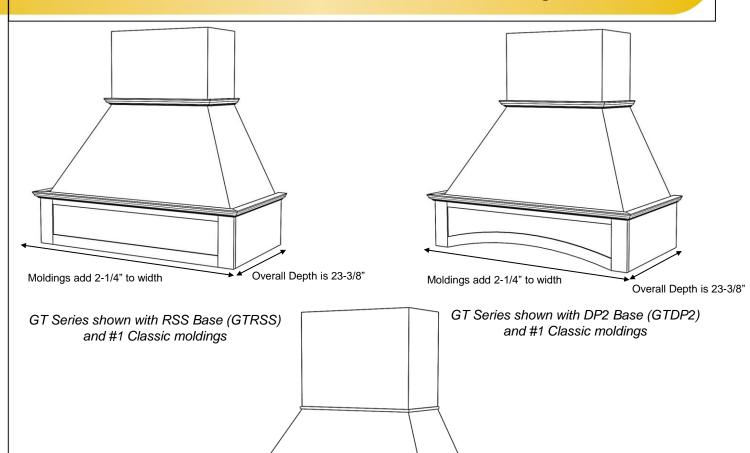

GT Series shown with Hardwood Base (GTHW)

GT Series	
Standard Widths	36, 42, 48, 54, 60 (Reduced widths available)
Standard Heights	42" (Modified heights available) Chimney can be trimmed in the field
Removable Options	Removable Top (RT) – see modifications section. Applied Removable Panel (ARP) – see modifications section.
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide
-	#1 Classic, #2 Simple #3 Basic Vertical (Base is horizontal)


Previously Named: T

STANISCI. DESIGN

Thompson - GT Series


Free Standing

Standard Height: 42

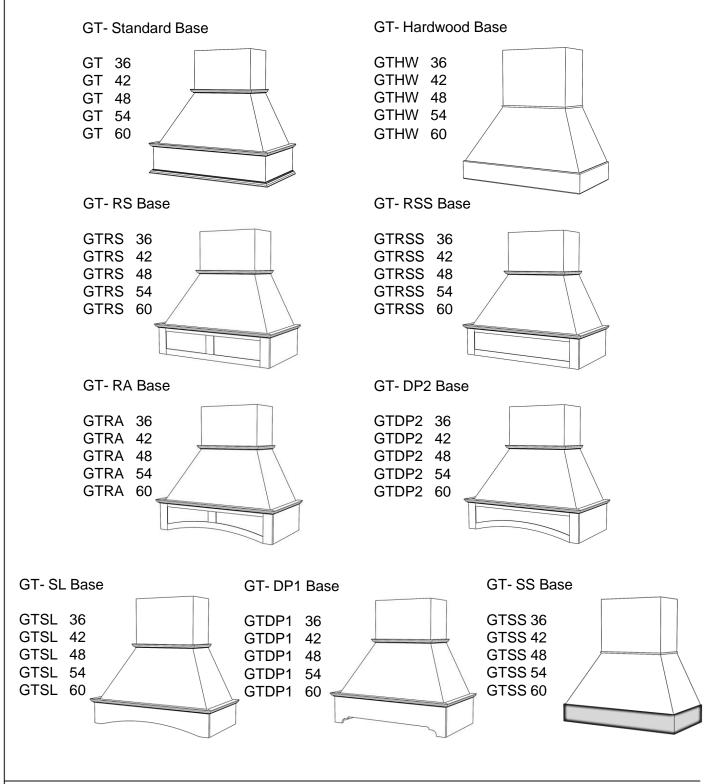

Hartford - H Series

In-Series

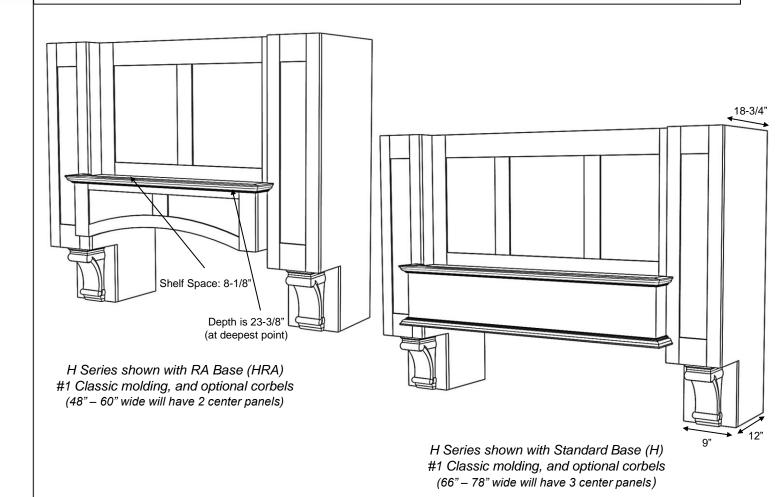


H Series	
Standard Widths	48, 54, 60, 66, 72, 78 (Reduced widths available) To calculate minimum width, take range width plus 18". Example: A 36" range would get a 54" wide hood. (36 + 18 = 54)
Standard Heights	38, 44, 50, 56, 62 (Reduced heights available) To calculate height, take ceiling height minus 52". Example: A 96" ceiling would have a 44" tall hood. (96 - 52 = 44)
Removable Options	Removable Panel is standard (MRP) 2" fixed top rail available by request (MRP-2TR) – see modifications section.
Ventilation	Hood must be a minimum of 18" wider than available vent width. Example: To use a 36" vent model, the hood should be a minimum of 54" wide
Available Moldings	#1 Classic, #2 Simple, #3 Basic
Available Options	Corbels - All Stanisci corbel options will fit this design (See corbel options page)
Grain Direction	Vertical (Base is horizontal)

Hartford - H Series

In-Series


Standard Heights: 38, 44, 50, 56, 62

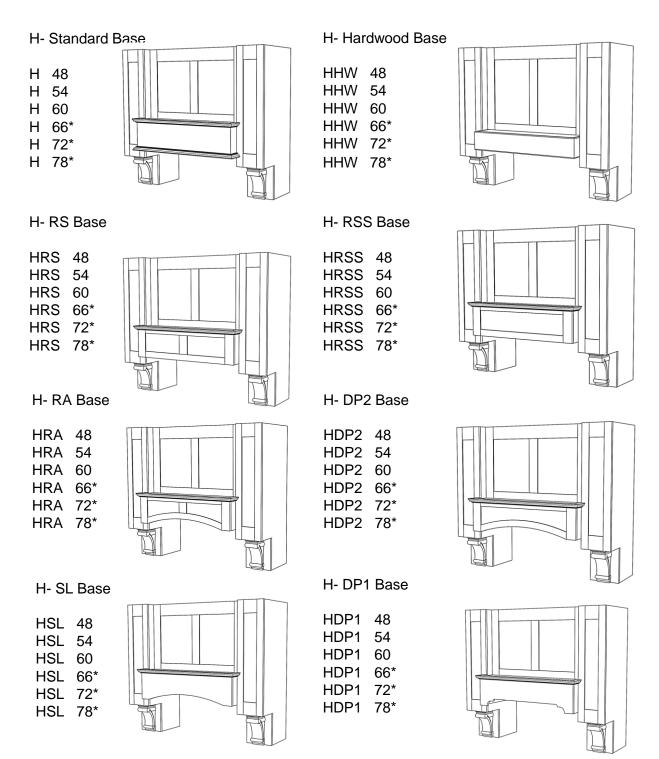

^{*} Top center panel is three panels rather than two, due to width of hood.

Huntington - H2 Series

In-Series

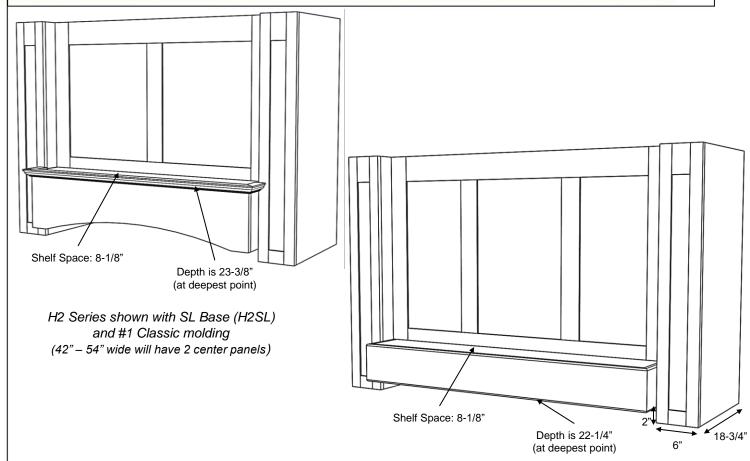


H2 Series shown with Hardwood Base (H2HW) (60" – 72" wide will have 3 center panels)

H2 Series	
Standard Widths	42, 48, 54, 60, 66, 72 (Reduced widths available) *Minimum Width 42" To calculate minimum width, take range width plus 12". Example: A 36" range would get a 48" wide hood. (36 + 12 = 48)
	26, 32, 38, 44, 50 To calculate height, take ceiling height minus 64". Example: A 96" ceiling would have a 32" tall hood. (96 - 64 = 32)
•	Removable Panel is standard (MRP) 2" fixed top rail available by request (MRP-2TR) – see modifications section.
•	Side columns will always have a flat panel Hood must be a minimum of 12" wider than available vent width. Example: To use a 36" vent model, the hood should be a minimum of 48" wide
Available Moldings Grain Direction	#1 Classic, #2 Simple, #3 Basic Vertical (Base is horizontal)

Huntington - H2 Series

In-Series


Standard Heights: 26, 32, 38, 44, 50

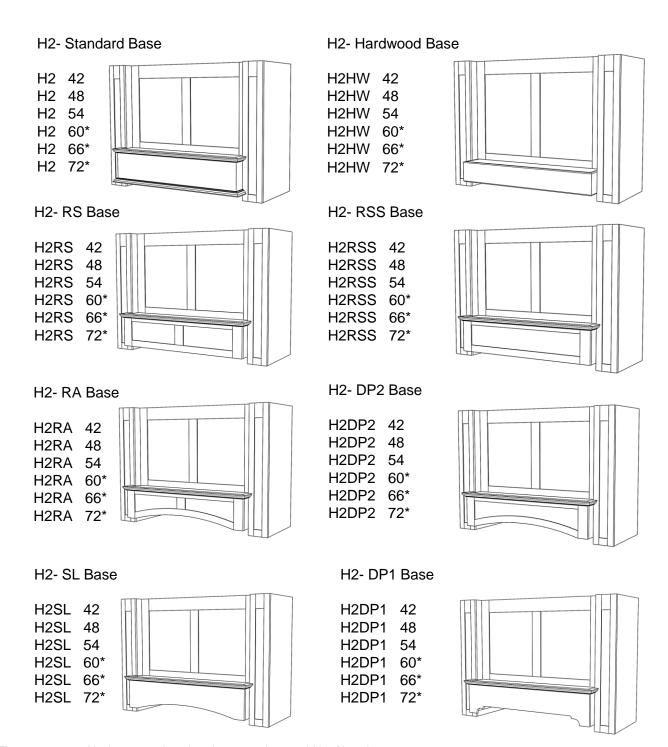

^{*} Top center panel is three panels rather than two, due to width of hood

Island - I Series

Island Application

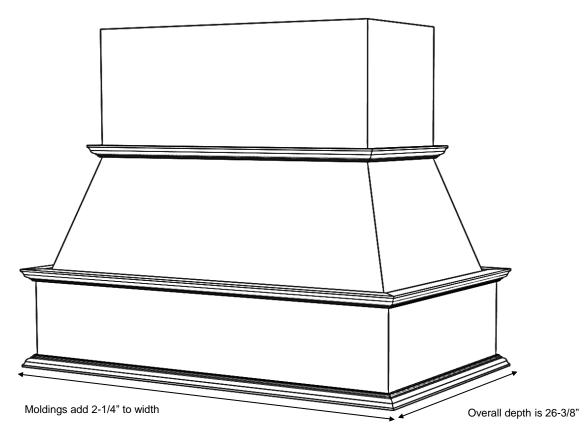

I Series shown with Standard Base (I) and #1 Classic moldings


I Series		
Standard Widths	36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 36" (Order 6" wider than cooking surface for best capture area)	
Standard Heights	30, 36, 42, 48 (Reduced heights available) (Not able to be trimmed in the field)	
Removable Options	Applied Removable Panel (ARP) – see modifications section.	
Ventilator	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide (PML – Pro Mesh Liner is the only available Stanisci vent unit for Island hood.)	
Available Moldings	#1 Classic, #2 Simple, #3 Basic	
Grain Direction	Vertical (Base is horizontal)	

Island - I Series

Island Application

Standard Heights: 30, 36, 42, 48


I- Standard Base




I- RS Base

IRS	36	
IRS	42	
IRS	48	
IRS	54	
IRS	60	

I- RSS Base




I- RA Base



I- DP2 Base

IDP2	36	
IDP2	42	
IDP2	48	
IDP2	54	
IDP2	60	

I- SL Base




I- DP1 Base

36	
42	
48	
54	
60	
	42 48 54

Jacksonville - J Series

In-Series

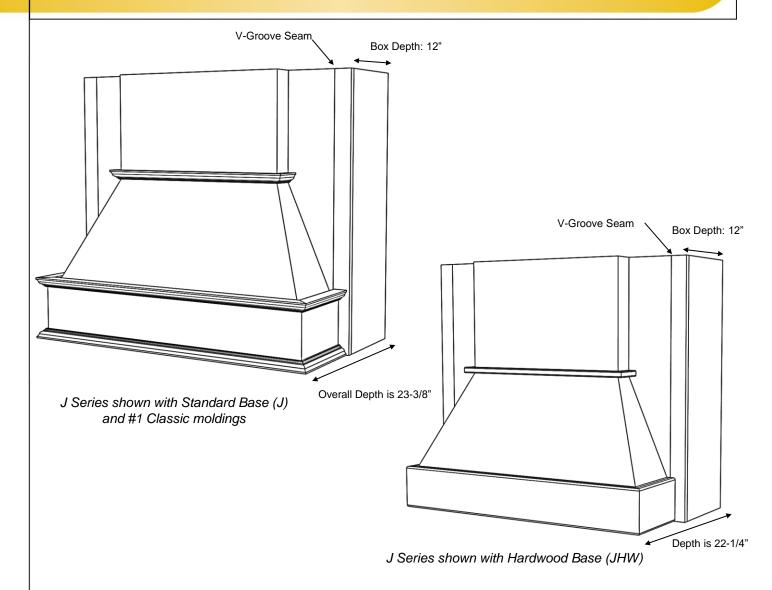


	J Series
Standard Widths	33, 36, 39, 42, 45, 48, 51, 54, 57, 60,63(Reduced widths available) *Minimum Width 33"
Standard Heights	30, 36, 42, 48 (Reduced heights available)
Removable Options	Removable Front (RF) – Rear Box will be 14" – see modifications section. Applied Removable Panel (ARP) – see modifications section.
Available Options	12" Rear Box can be modified by request.
Ventilation	Hood must be a minimum of 3" wider than available vent width. Example: To use a 36" vent model, the hood should be a minimum of 39" wide
Available Moldings Grain Direction	#1 Classic, #2 Simple, #3 Basic Vertical (Base is horizontal)

Jacksonville - J Series


In-Series

Standard Heights: 30, 36, 42, 48

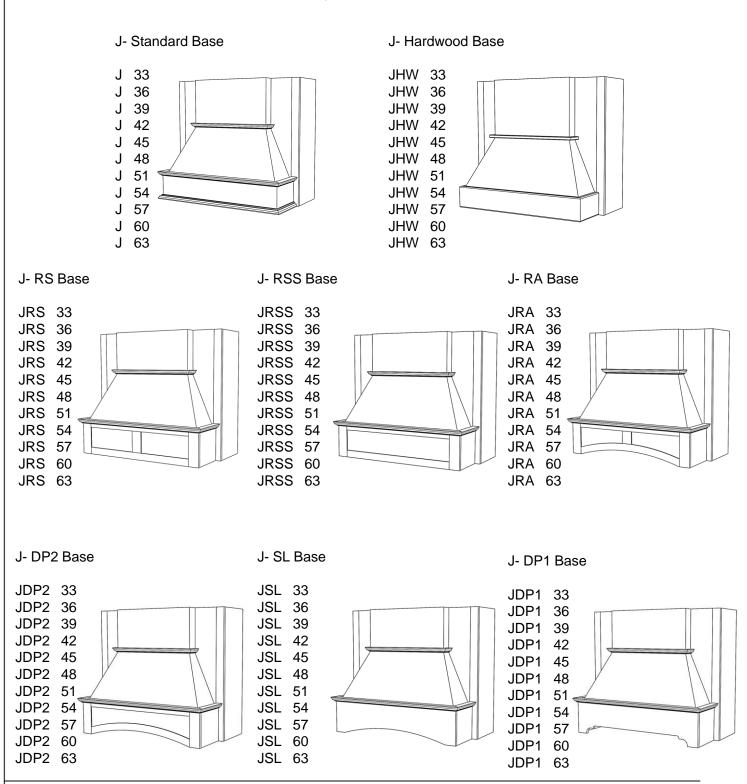

Kingston – K200 Series

Free Standing

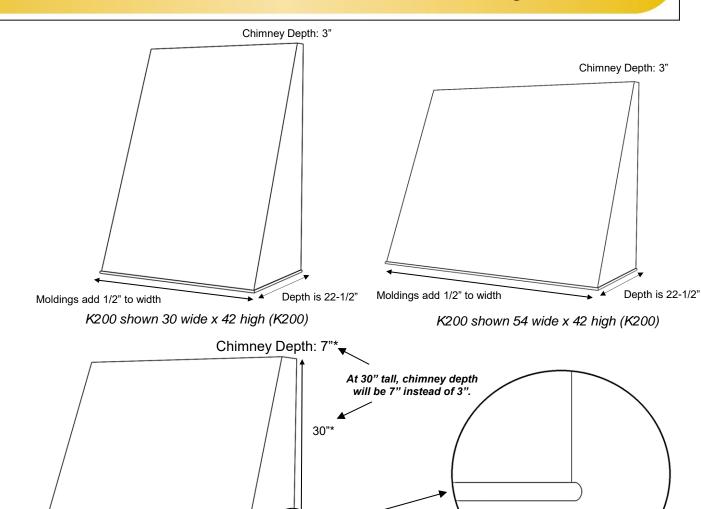

K200 Serie	S

K200 shown 36 wide x 30 high (K200)

Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"
Standard Heights	30, 36, 42, 48, 54, 60 (Reduced heights available)
Removable Options	Not available
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide (PML- Special Depth 18-1/8" Pro Mesh Liner is only available Stanisci vent unit) Ventilation must be ducted out of the rear of the hood.
Grain Direction	Vertical Hoods over 48" wide will have horizontal grain

700 South Glaspie Street • Oxford, MI 48371 • (248) 572-6880 • email: sales@wood-hood.com • www.wood-hood.com

Moldings add 1/2" to width


Kingston – K200 Series

Free Standing

Standard Heights: 30**, 36, 42, 48, 54, 60

K200


K200 30 K200 36 K200 42 K200 48 K200H 54* K200H 60*

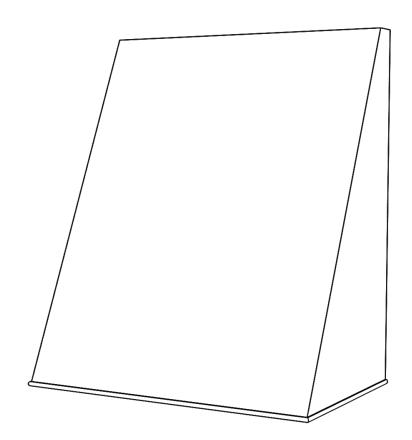

- * Hoods over 48" wide have a maximum height of 42" and will have horizontal grain.
- ** At 30" tall, the top depth will be 7" instead of 3".

Kilgore - K300 Series

In-Series

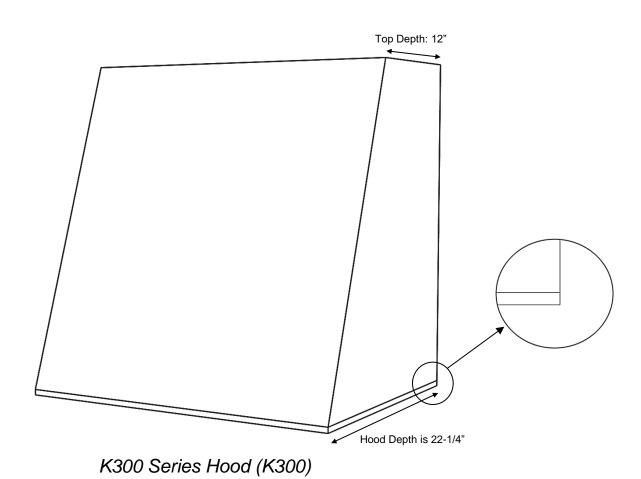


	K300 Series
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"
Standard Heights	30, 36, 42, 48, 54, 60 (Reduced heights available)
Removable Options	Not available
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide. (PML – Special Depth 18-1/8" Pro Mesh Liner is only available Stanisci vent unit)
Grain Direction	 Vertical Hoods over 48" wide will have horizontal grain

Kilgore - K300 Series

In-Series

Standard Heights: 30, 36, 42, 48, 54, 60


K300

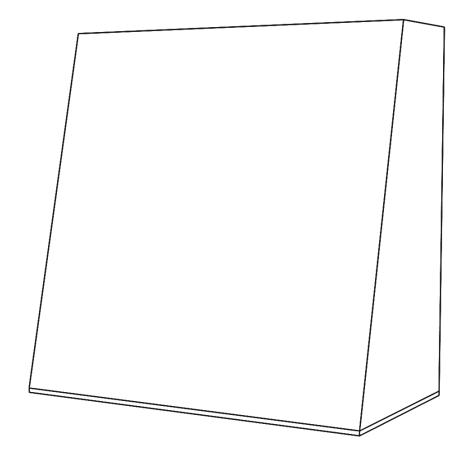

^{*} Hoods over 48" wide have a maximum height of 42" and will have horizontal grain.

Lexington - L Series

In-Series

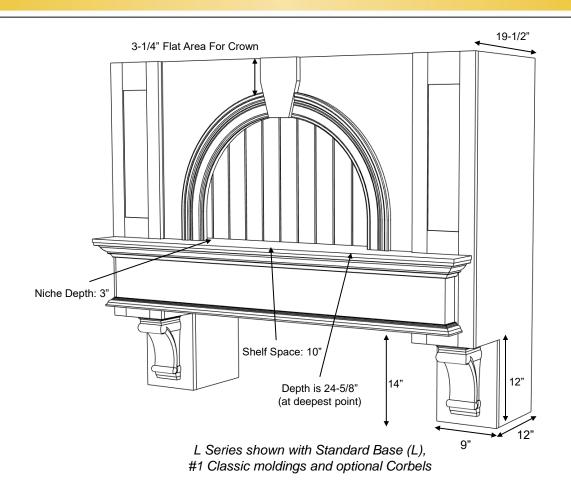


L Series		
Standard Widths	48, 54, 60, 66, 72, 78 (Reduced widths available) To calculate minimum width, take range width plus 18". Example: A 36" range would get a 54" wide hood. (36 + 18 = 54)	
Standard Heights	44, 50, 56, 62 (Reduced heights available) To calculate height, take ceiling height minus 52". Example: A 96" ceiling would have a 44" tall hood. (96 - 52 = 44)	
Removable Options Available Options	Removable Panel is standard (Two seams in beading to allow for access) Non-bead panel by request – will not be removable (NBNA) - see modifications section. Corbels (All Stanisci corbels will fit this design)	
Ventilation	Hood must be a minimum of 18" wider than available vent width. Example: To use a 36" vent model, the hood should be a minimum of 54" wide.	
Available Moldings Grain Direction	#1 Classic, #2 Simple Vertical (Base is horizontal)	

Lexington - L Series

In-Series


Standard Heights: 44, 50, 56, 62

L- Standard Base

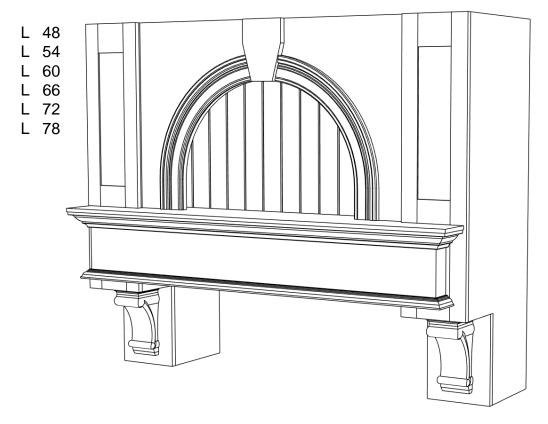


Lincoln - L2 Series


In-Series



L2 Series shown with 3 Upper Door Panels and 3 Base Door Panels (L2BPUP 3-3)



L2 Series shown with 2 Upper Door Panels and 1 Base Door Panel (L2BPUP 1-2)




L2 Series shown with 3 Upper Door Panels And Hardwood Slab (L2UP -3)

	L2 Series
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"
Standard Heights	24, 30, 36, 42, 48 (Reduced heights available)
Removable Options	Removable Panel - Standard
Available Options	Applied Molding Wrap (See options page) Applied Hardwood Wrap (See options page)
Standard Assumptions	Base door panels must be flat
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide
Grain Direction	Vertical (Base is horizontal

Lincoln - L2 Series

In-Series

Standard Widths: 30, 36, 42, 48, 54, 60 Standard Heights: 24, 30, 36, 42, 48

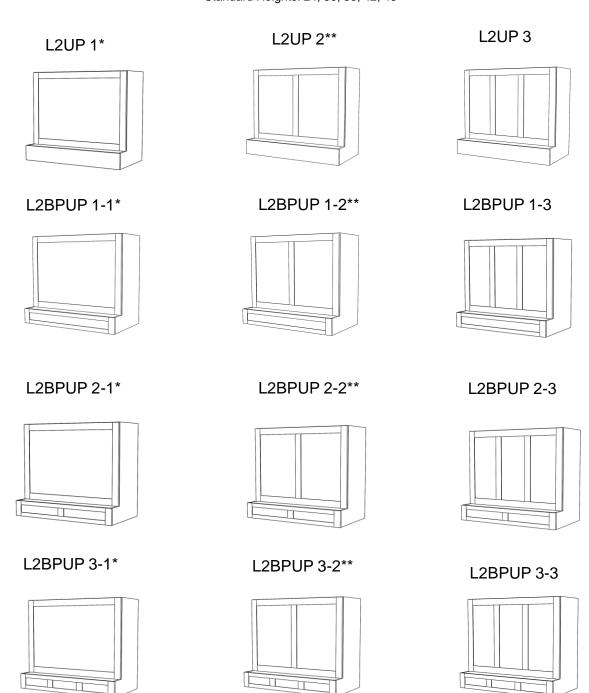



^{*} In all sizes, 1 upper door panel option requires Paint Grade.

^{**} Hoods over 48" wide, 2 upper door panel option requires Paint Grade.

Madison - M Series


In-Series



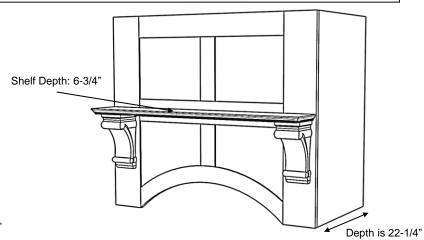

M Series shown with no shelf (M)

MS Series shown with optional corbels (MS)



	M Series
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"
Standard Heights	24, 30, 36, 42, 48 (Reduced heights available)
Removable Options	Removable Panel – Standard on MS style only (MRP) 2" fixed top rail available by request (MRP-2TR) –See modifications section.
Available Options	Decorative shelf is the default shelf style Basic shelf style is available upon request Corbels – All Stanisci corbel options will fit this design (See corbel options page)
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide
Grain Direction	Vertical

Madison - M Series

In-Series

Standard Heights: 24, 30, 36, 42, 48




Decorative Shelf- Standard




Basic Shelf- Optional

M- 4 Panels Without Shelf




MS- 4 Panels With Shelf

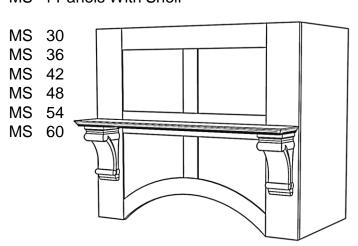


MDP- Two Panels

MDP 30 MDP 36 MDP 42 MDP 48 MDP 54 MDP 60



Naples - N Series

In-Series

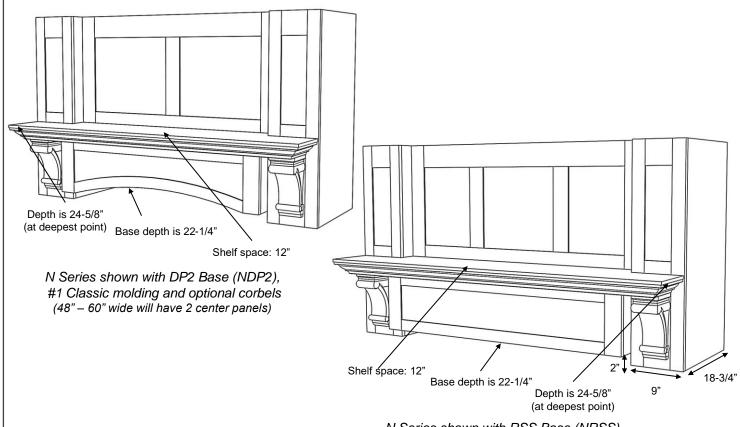


N Series shown with RSS Base (NRSS), #1 Classic molding and optional corbels (66" – 78" wide will have 3 center panels)


N Series	
Standard Widths	48, 54, 60, 66, 72, 78 (Reduced widths available) To calculate minimum width, take range width plus 18". Example: A 36" range would get a 54" wide hood. (36 + 18 = 54)
Standard Heights	26, 32, 38, 44, 50 (Reduced heights available) To calculate height, take ceiling height minus 64". Example: A 96" ceiling would have a 32" tall hood. (96 - 64 = 32)
Removable Options	Removable Panel is standard (MRP) 2" fixed top rail available by request (MRP-2TR) – see modifications section.
Ventilation	Hood must be a minimum of 18" wider than available vent width. Example: To use a 36" vent model, the hood should be a minimum of 54" wide
Available Moldings	#1 Classic, #2 Simple
Available Options	Corbels - All Stanisci corbel options will fit this design (See corbel options page)
Grain Direction	Vertical (Base is horizontal)


Naples - N Series

In-Series

Standard Heights: 26, 32, 38, 44, 50

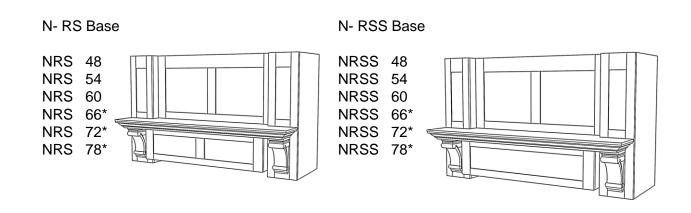

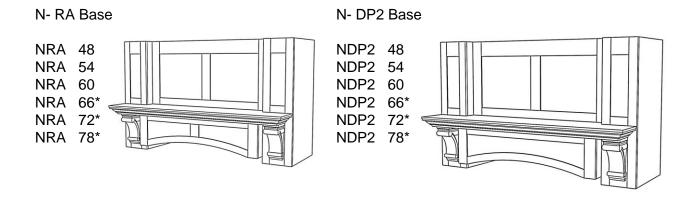


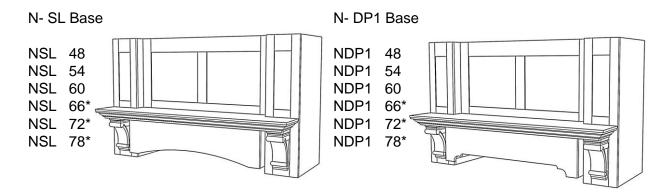

*Top center panel is three panels rather than two, due to width of hood.

Plymouth – P Series

In-Series

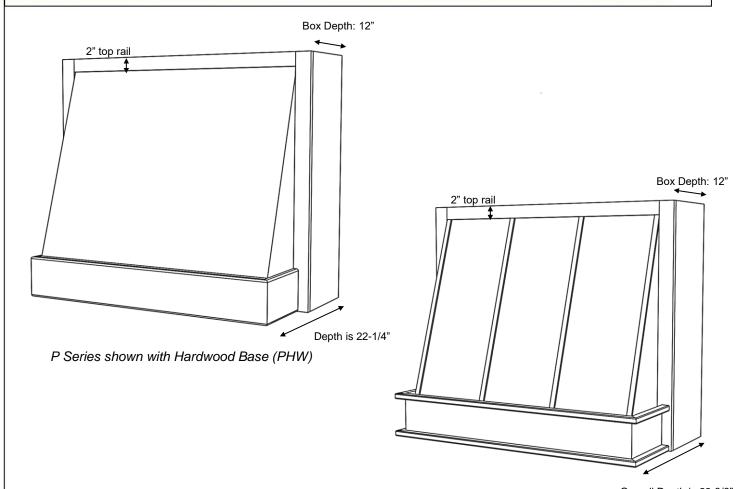


P Series shown with PL Base (PPL) Overall Depth is 23-3/8" and optional Hardwood Battens

P Series	
Standard Widths	33,36,39,42,45,48,51,54,57,60,63 (Reduced widths available)
Standard Heights	24, 30, 36, 42, 48 (Reduced heights available)
Removable Options	Removable Front (RF) – Rear Box Depth will be 16" – see modifications section. Applied Removable Panel (ARP) – see modifications section.
Ventilation	Hood must be a minimum of 3" wider than available vent width. Example: To use a 36" vent model, the hood should be a minimum of 39" wide
Available Moldings	#3 Basic is standard
Available Options	Hardwood Battens (See battens options page) 12" Box Depth can be modified by request
Grain Direction	Vertical (Base is horizontal) Hoods over 48" wide will have horizontal grain on angled front.


Plymouth - P Series

In-Series

Standard Heights: 24, 30, 36, 42, 48

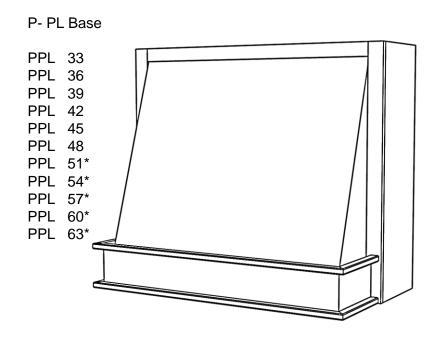


P- Hardwood Base

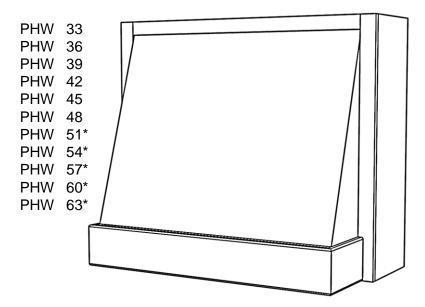

^{*} Hoods over 48" wide will have horizontal grain on angled front.

Quebec - Q Series

In-Series

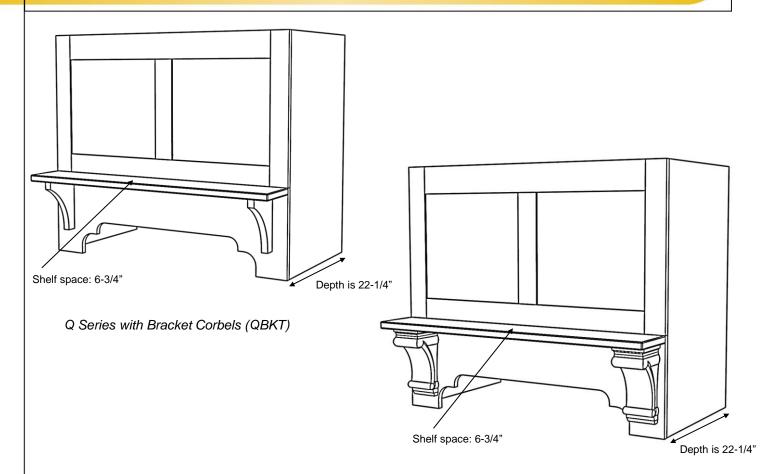

Q Series (QS) shown with optional corbels.

	Q Series
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"
Standard Heights	24, 30, 36, 42, 48 (Reduced heights available)
Removable Options	Removable Panel is standard (MRP) 2" fixed top rail available by request (MRP-2TR) – see modifications section.
Ventilator	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide.
Available Options	Basic shelf is the default shelf style Decorative shelf style is available upon request Corbels – All Stanisci corbel options will fit this design (See corbel options page)
Grain Direction	Vertical (Base is horizontal)

Quebec - Q Series

In-Series

Standard Heights: 24, 30, 36, 42, 48




Basic Shelf- Standard



Decorative Shelf- Optional


QBKT- With Shelf and Simple Brackets

		_	
QBKT	30		
QBKT	36		
QBKT	42		
QBKT	48		
QBKT	54		
QBKT	60		
			J

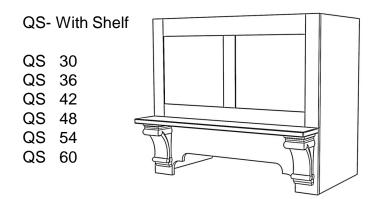

STANISCI Saddlebrook - SB100 Series

In-Series

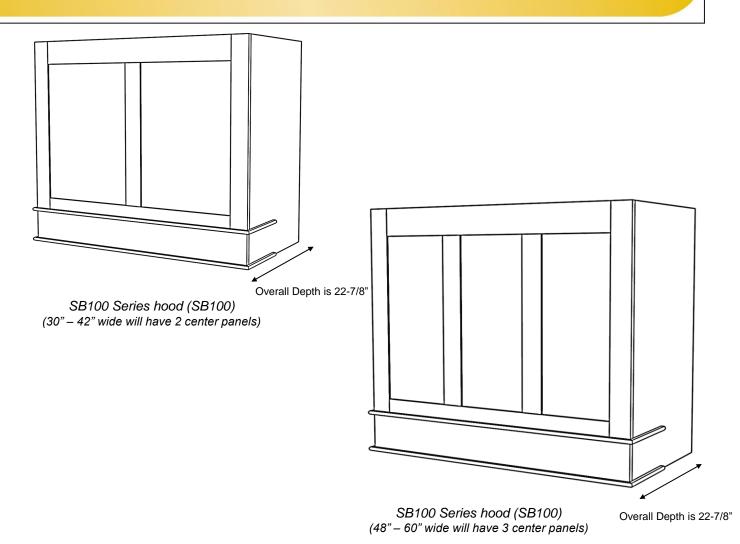

SB100 Series	
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"
Standard Heights	24, 30, 36, 42, 48 (Reduced heights available)
Removable Options	Removable Panel – standard (MRP) 2" fixed top rail available by request (MRP-2TR) – see modifications section.
Standard Assumptions	Moldings will be shipped loose, cut and sized to full depth of hood, and field trimmed to size.
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide.
Grain Direction	Vertical (Base is horizontal)

STANISCI Saddlebrook - SB100 Series

In-Series

Standard Heights: 24, 30, 36, 42, 48

SB100 - Standard Hood


SB100 30 SB100 36

SB100 42

SB100 48*

SB100 54*


SB100 60*

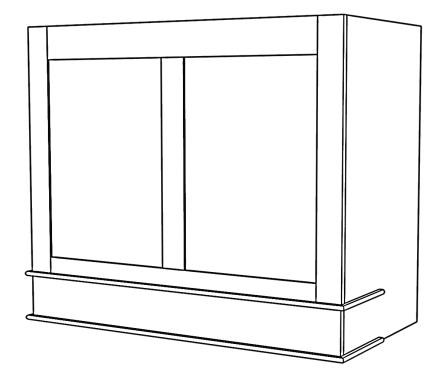


^{*} There will be three panels rather than two, due to width of hood

Springfield - S Series

In-Series

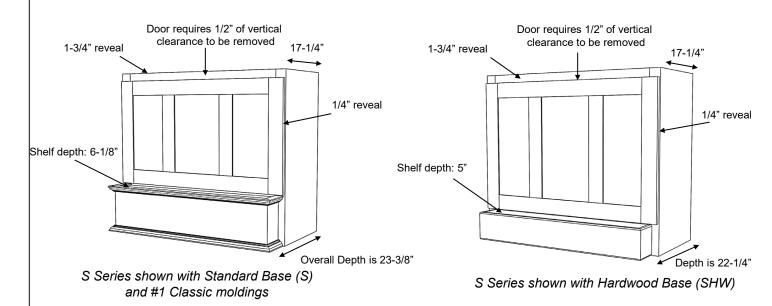

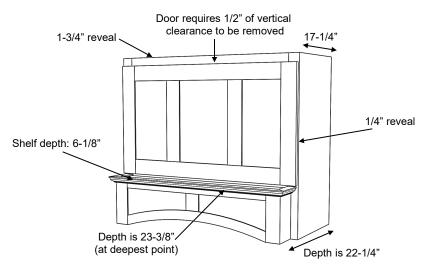


S Series shown with RA Base (SRA) and #1 Classic moldings

	S Series
Standard Widths	33, 36, 39, 42, 45, 48, 51, 54, 57, 60, 63 (Reduced widths available)
Standard Heights	24, 30, 36, 42, 48 (Reduced heights available)
Removable Options	Removable Panel is standard
	Door removes by pulling upwards. Minimum 1/2" clearance is needed above top of door.
Ventilation	Hood must be a minimum of 3" wider than available vent width.
	Example: To use a 36" vent model, the hood should be a minimum of 39" wide.
Available Moldings	#1 Classic, #2 Simple, #3 Basic
Grain Direction	Vertical (Base is horizontal)

Springfield - S Series

In-Series


Standard heights of 24, 30, 36, 42, 48

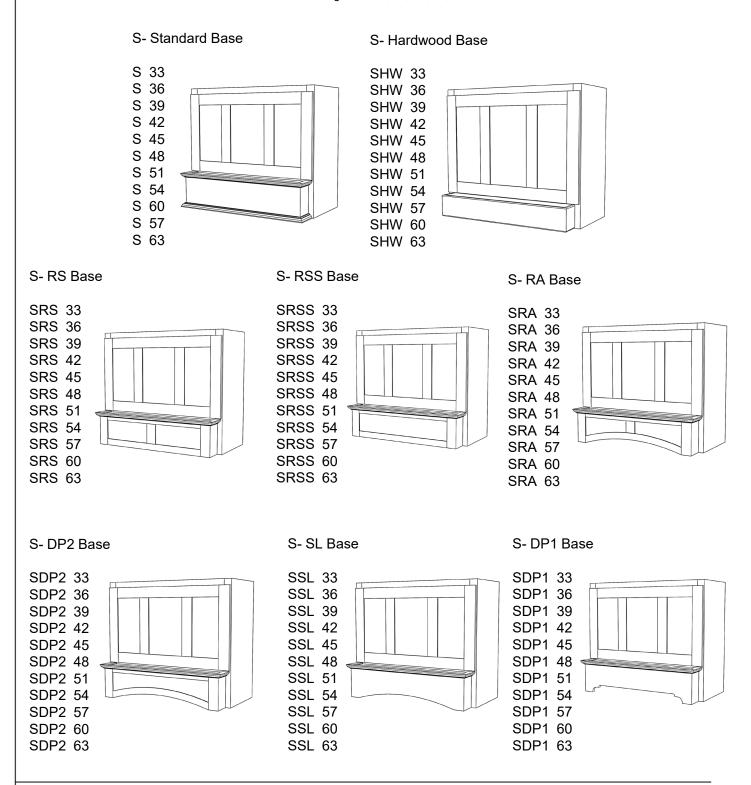


Victoria - VX Series

Free Standing





VX Series (VX)

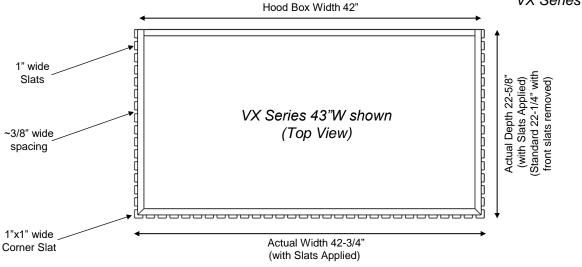

VX Series	
	31, 37, 43, 49, 55, 61 (Reduced widths available) *Minimum Width 31" *Please Note: The true width will be 1/4" less than width ordered. Example : The finished width of a 37" wide hood will be 36-3/4".
	24, 30, 36, 42, 48 (Reduced heights available)
Removable Options	Not available
·	Slats will be 1" wide x 3/8" thick Hardwood with a 1/16" radius on long edges Slat spacing is ~3/8", varies slightly with hood width Average weight could exceed 100 pounds. Hood must be properly anchored to the wall
	Hood must be a minimum of 1" wider than available vent width. Example: To use a 36" vent model, the hood should be a minimum of 37" wide
Grain Direction	Vertical

Victoria - VX Series

Free Standing

Standard Heights: 24, 30, 36, 42, 48

VX - Standard Hood

VX 31


VX 37

VX 43

VX 49


VX 55

VX 61

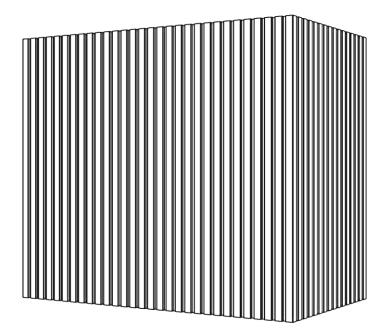

STANISCI Washington - W Series D E 5 I G N

In-Series

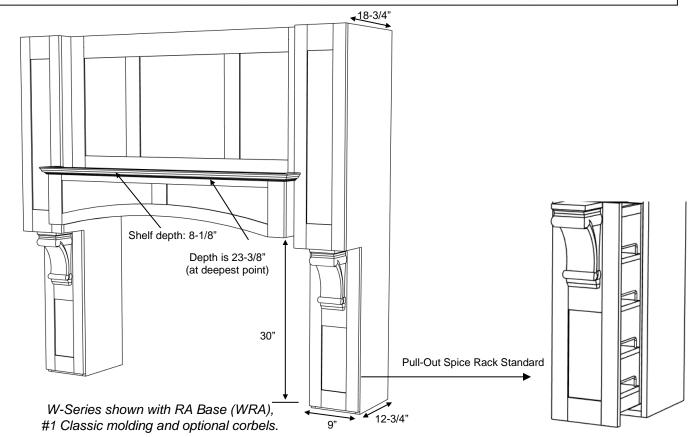

	W Series
Standard Widths	66, 72, 78, 84, 90 (Reduced widths available) *Minimum Width 66" To calculate minimum width, take range width plus 36". Example: A 36" range would get a 72" wide hood. (36 + 36 = 72) (Assumes 9" clearance between cook top and leg on both sides. Refer to your local building codes for minimum required clearance.)
Standard Heights	54, 60, 66, 72, 78, 84 (Reduced heights available) To calculate height, take ceiling height minus 36". Example: A 96" ceiling would have a 60" tall hood. (96 - 36 = 60)
Removable Options	Removable Panel is standard (MRP) 2" fixed top rail available by request (MRP-2TR) – see modifications section.
Ventilation	Hood must be a minimum of 18" wider than available vent width. Example: To use a 54" vent model, the hood should be a minimum of 72" wide
Available Moldings	#1 Classic #2 Simple #3 Basic
Available Options	Pull out spice racks are standard – can be removed by request. Corbels - All Stanisci corbel options will fit this design (See corbel options page) Legs are set up for corbels, but full-size door can be requested if corbels are not being used.
Grain Direction	Vertical (Base is horizontal)


Washington - W Series

In-Series

Standard Heights: 54, 60, 66, 72, 78, 84


W- Standard Base

W 66 W 72 W 78 W 84 W 90




W-RS Base

WRS 66 WRS 72 WRS 78 WRS 84 WRS 90



W-RA Base

WRA 66 **WRA 72 WRA 78 WRA 84** WRA 90




W-SL Base

WSL 66 WSL 72 WSL 78 WSL 84 WSL 90


W- Hardwood Base

WHW 66 WHW 72 WHW 78 WHW 84 WHW 90



W-RSS Base

WRSS 66 WRSS 72 WRSS 78 WRSS 84 WRSS 90




W-DP2 Base

WDP2 66 WDP2 72 WDP2 78 WDP2 84 WDP2 90




W-DP1 Base

WDP1 66 WDP1 72 WDP1 78 WDP1 84 WDP1 90



Xavier - X Series

In-Series

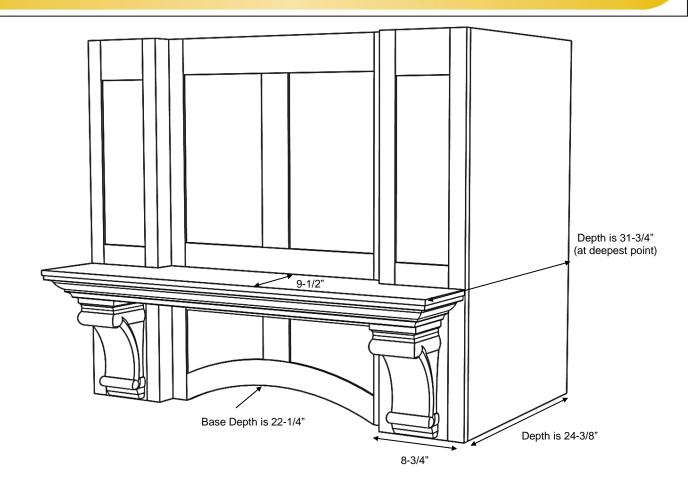


X-Series shown with RA Base (XRA), #1 Classic Molding, and optional corbels

X Series		
Standard Widths	30, 36, 42, 48, 54, 60 (Reduced widths available) *Minimum Width 30"	
Standard Heights	24, 30, 36, 42, 48 (Reduced heights available)	
Removable Options	Not available	
Ventilation	Hood will be same width as available vent width. Example: To use a 36" vent model, the hood should be a minimum of 36" wide.	
Available Moldings	#1 Classic, #2 Simple	
Available option	Corbels - All Stanisci corbel options will fit this design (See corbel options page)	
Grain Direction	Vertical	

Xavier - X Series

In-Series


Standard Heights: 24, 30, 36, 42, 48

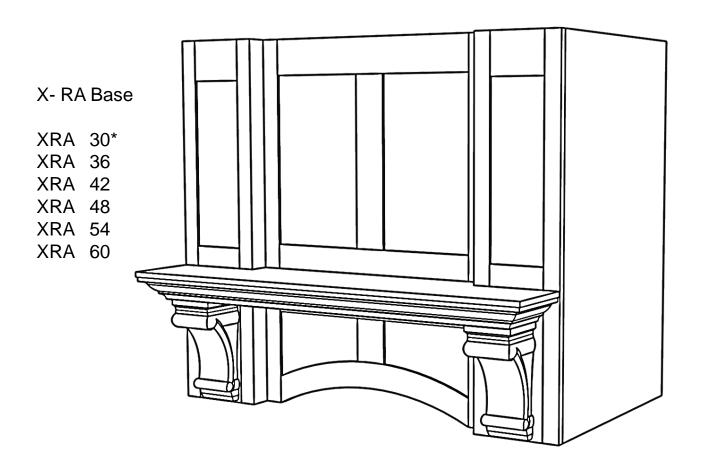

*Door Panels must be flat

Zenith - Z200 Series

In-Series

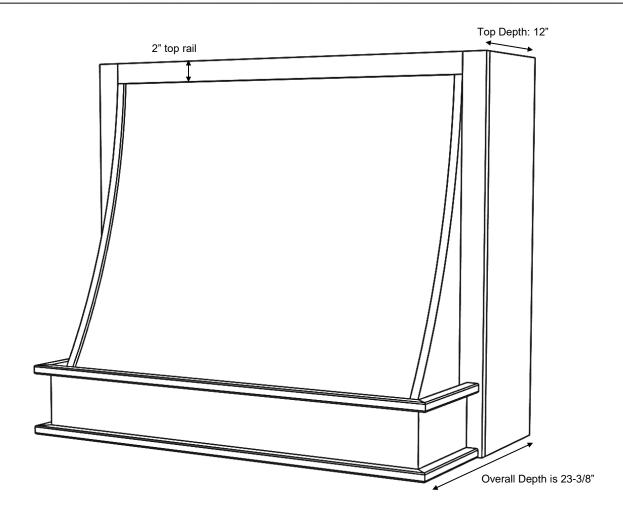

Z200 series shown with PL Base (Z200PL)

Z200 Series		
Standard Widths	33,36,39,42,45,48,51,54,57,60,63 (Reduced widths available)	
Standard Heights	30, 36, 42, 48 (Reduced heights available)	
Removable Options	Removable Front (RF) – Rear Box must be 16" – see modifications section.	
Ventilation	Hood must be a minimum of 3" wider than available vent width. Example: To use a 36" vent model, the hood should be a minimum of 39" wide.	
Available Option	12" Box Depth can be modified by request.	
Grain Direction	Vertical (Base is horizontal) Hoods over 48" wide will have horizontal grain on sloped front	


Zenith - Z200 Series

In-Series

Standard Heights: 30, 36, 42, 48

Z200- PL Base

Z200PL 33 Z200PL 36 Z200PL 39 Z200PL 42 Z200PL 45 Z200PL 51* Z200PL 51* Z200PL 54* Z200PL 57* Z200PL 60* Z200PL 63*

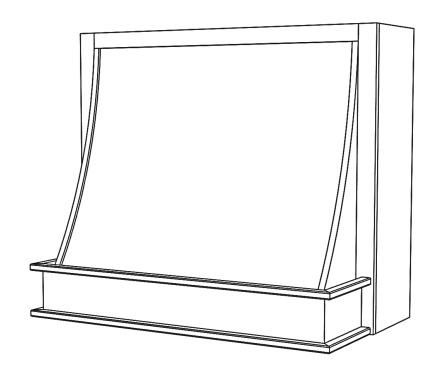


^{*} Hoods over 48" wide will have horizontal grain on sloped front.

Custom Hoods

Made to Order

All Stanisci Design Custom Range Hoods are built to order based on your specifications, and available in 12 different species! We offer a full line of ventilation engineered specifically for our range hoods, or we can modify our hoods to fit the homeowner's 3rd party vent unit. If you're interested in a design not shown in our catalog, send us a drawing / sketch/ picture to sales@wood-hood.com and someone from our Customs Department will be in touch!

Check us out on social media and www.wood-hood.com for even more design inspiration!







@WoodRangeHoods houzz @Stanisci Design & Manufacturing

Custom S-Series Design created for Revive Home Studio in Marco Island, FL





This page left intentionally blank

STANISCI Stainless Base w/ Baffle Filters Now available in 17 finishes SS-BASE VENTILATION



Underside view - Baffle filters will always be stainless steel regardless of selected finish

Stainless Base w/ Baffle Filters

Metal Baffle Bases can be ordered in place of the 6" high Hardwood Base on many of our range hood designs, and also serve as the hoods ventilation system. These Metal Baffle Bases consist of a 6" metal bottom and a fully integrated baffle liner on the underside complete with LED lights, stainless steel baffle filters, and control

			kr	nobs.		
Available Widths	30, 36	30, 36, 42, 48, 54, 60 (custom widths are not available)				
Motor Options	600/3	00 CFM,	1200 CFM			
Available Hood Models	B, BX	D, BX, BX	(V, C, CX, D, E, E200), ER200, ER600, F.	X200, G, and	GT
Standard Finishes (in stock)	Stainl	ess Steel	(SS)			
PRICE LEVEL 1 (SPECIAL ORDER 6-8 WEEK LEAD TIME)						
Gold Stainless (GS)	; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ;			Powder Coat: Aged Bronze (PC-AB)		
	· · · · · · · · · · · · · · · · · · ·			t: Wilson Blue Powder Coat: Gardenia -WB) (PC-GA)		
Powder Coat: Traffic White Powder Coat: Jet Black Powder Coat: Flat Black (PC-TW) (PC-JB) (PC-BM)						
PRICE LEVEL 2 (SPECIAL ORDER 6-8 WEEK LEAD TIME)						
Brushed Brass Coated Brushed Brass *will patina Smoked Brass (BBC) (SB) (SB)						
Brushed Copper *will patina (BC)			·		Smoked Copper (SC)	

STANISCI Stainless Base w/ Baffle Filters Now available in 17 finishes


SS-BASE VENTILATION

STANDARD FINISH (Stocked at Factory)



Stainless Steel - SS

SPECIAL ORDER FINISHES (6-8 week lead-time)

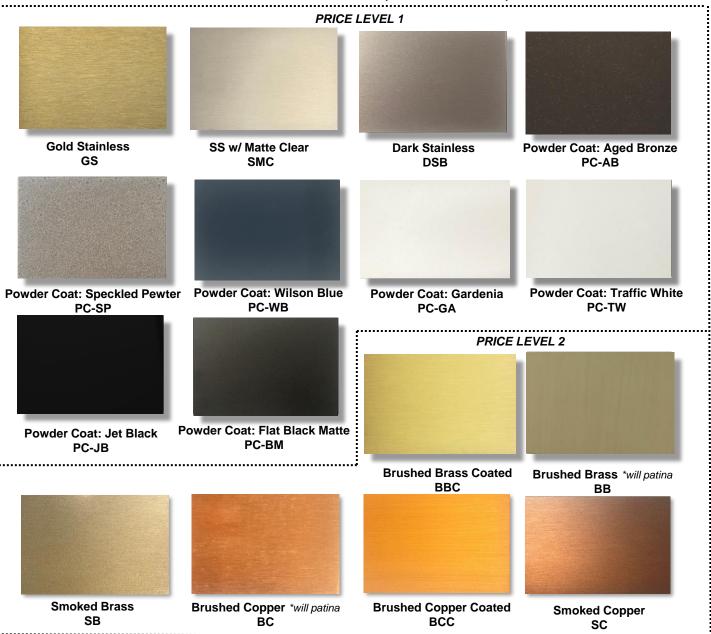

STANISCI Stainless Base w/ Baffle Filters

SS-BASE VENTILATION

SS Base w/ Baffle Filters

> Technical Features:

- 6" high metal base available in 17 finishes
- •Fully integrated baffle liner on the underside of metal base
- Dimmer controlled LED lighting
 - Variable speed fan control
- Large dishwasher safe brushed stainless steel baffle filters
- Several blower combinations available
 - Liner sizes available from 30" – 60"



Stanisci Design ventilation has been engineered specifically for Stanisci Design Range Hoods, and are in-stock and ready to ship!

Features your customers want:

- Dishwasher safe filters
- Easy cleaning
- Dimmer controlled LED lighting
- •European design
- Three year in home warranty
- •Quiet, variable speed blower- made in Germany






STANISCI Stainless Base w/ Baffle Filters

SS-BASE VENTILATION

SM600/300 SS-BASE-600/300-XX	*comes with optional wire harness to reduce max CFM to 300		
DUCTING	8" ROUND		
AMPS	110V - 15 amp dedicated circuit		
SS-BASE-600/30 SS-BASE-600/30 SS-BASE-600/30 SS-BASE-600/30	00-36: 36 W x 22-1/4 D 00-42: 42 W x 22-1/4 D 00-48: 48 W x 22-1/4 D		

SS-BASE-600/300-60: 60 W x 22-1/4 D

1200 CFM motor		
10" ROUND		
110V - 15 amp dedicated circuit		
BLE IN 30" WIDE 36: 36 W x 22-1/4 D 42: 42 W x 22-1/4 D 48: 48 W x 22-1/4 D 54: 54 W x 22-1/4 D		
1		

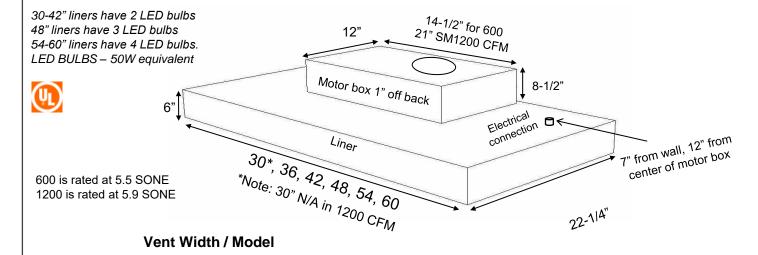

WOOD HOOD MODEL & SIZE	SS-BASE-30	SS-BASE-36	SS-BASE-42	SS-BASE-48	SS-BASE-54	SS-BASE-60
C,CX, E200, ER200, ER600, FX200	30	36	42	48	54	60
B, D, E, G, GT	N/A	36	42	48	54	60
BXD, BX, BXV	30	36	42	48	54	60

PML Ventilation

Professional Mesh Liners (PML)

Professional <u>Mesh Li</u>ners

Technical Features:

- Dimmer LED lighting
 - Variable speed fan control
- Large dishwasher safe stainless steel mesh insert filters
- Several blower combinations available
- •Liner sizes available from 30" 60"
- Made exclusively for Stanisci Design by Modern-Aire Ventilation



Stanisci Design ventilation has been engineered specifically for Stanisci Design Range Hoods, and are in-stock and ready to ship!

Features your customers want:


- Dishwasher safe filters
- Dimmer controlled LED lighting
- •European design
- •Three year in home warranty
- Quiet, variable speed blower- made in Germany
- •Charcoal filters available for re-circulating applications (air must be directed out of hood to maintain warranties).

PML Ventilation

Professional Mesh Liners (PML)

SM600/300 PML-600/300-XX	*comes with optional wire harness to reduce max CFM to 300				
DUCTING	8" ROUND				
AMPS	110V - 15 amp dedicated circuit				
PML-600/300 PML-600/300 PML-600/300 PML-600/300 PML-600/300	0-36: 34-3/8 W x 20-5/8 D 0-42: 40-3/8 W x 20-5/8 D 0-48: 46-3/8 W x 20-5/8 D 0-54: 52-3/8 W x 20-5/8 D				

SM1200 PML-1200-XX	1200 CFM motor		
DUCTING	10" ROUND		
AMPS	110V - 15 amp dedicated circuit		
NOT AVAILA	BLE IN 30" WIDE		
PML-1200-36:	34-3/8 W x 20-5/8 D		
PML-1200-42:	40-3/8 W x 20-5/8 D		
PML-1200-48:	46-3/8 W x 20-5/8 D		
PML-1200-54:	52-3/8 W x 20-5/8 D		
PML-1200-60:	58-3/8 W x 20-5/8 D		

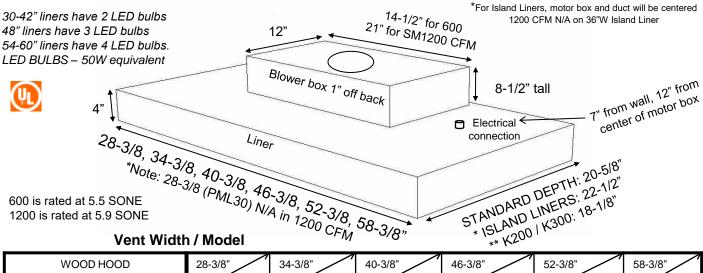

Tone Wide				*. /-		
WOOD HOOD MODEL & SIZE	28-3/8" PML-30	34-3/8" PML-36	40-3/8" PML-42	46-3/8" PML-48	52-3/8" PML-54	58-3/8" PML-60
C,CX, E200, E300, ER200, ER300, ER400, ER500, ER600, FX200, FX300, K200**, K300**, L2, SB100	30	36	42	48	54	60
I – ISLAND (36 N/A w/1200 CFM)	N/A	36	42	48	54	60
B, D, E, G, GT	N/A	36	42	48	54	60
W	N/A	N/A	N/A	66	72	78, 84, 90
H, L, N	48	54	60	66	72	78
BXD, BX, BXV, M, Q, X	30	36	42	48	54	60
A, J, P, S, Z200	33 or 36	39 or 42	45 or 48	51 or 54	57 or 60	63
H2	42	48	54	60	66	72
AX, VX	31	37	43	49	55	61

PBL Ventilation

Professional Baffle Liner (PBL)

Professional Baffle Liners

Technical Features:

- Dimmer controlled LED lighting
 - Variable speed fan control
- Large dishwasher safe brushed stainless steel baffle filters
 - Large capture area
- Several blower combinations available
- Liner sizes available from 30" – 60"
- •22 gauge Stainless Steel



Stanisci Design ventilation has been engineered specifically for Stanisci Design Range Hoods, and are in-stock and ready to ship!

Features your customers want:

- Dishwasher safe filters
- Easy cleaning
- Dimmer controlled LED lighting
- •European design
- •Three year in home warranty
- Quiet, variable speed blower- made in Germany






PBL Ventilation

Professional Baffle Liner (PBL)

SM600/300 PBL-600/300-XX	600 CFM motor *comes with optional wire harness to reduce max CFM to 300		
DUCTING	8" ROUND		
AMPS	110V - 15 amp dedicated circuit		
PBL-600/300-3 PBL-600/300-4 PBL-600/300-4 PBL-600/300-3 PBL-600/300-4	36: 34-3/8 W x 20-5/8 D 42: 40-3/8 W x 20-5/8 D 48: 46-3/8 W x 20-5/8 D 54: 52-3/8 W x 20-5/8 D		


SM1200 PBL-1200-XX	1200 CFM motor		
DUCTING	10" ROUND		
AMPS	110V - 15 amp dedicated circuit		
NOT AVAII	LABLE IN 30" WIDE		
PBL-1200-36:	34-3/8 W x 20-5/8 D		
PBL-1200-42:	40-3/8 W x 20-5/8 D		
PBL-1200-48:	46-3/8 W x 20-5/8 D		
PBL-1200-54:	52-3/8 W x 20-5/8 D		
PBL-1200-60:	58-3/8 W x 20-5/8 D		

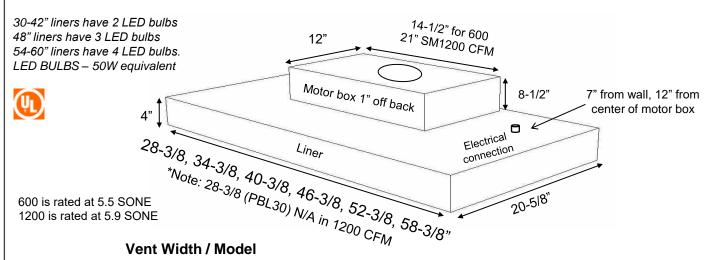

WOOD HOOD MODEL & SIZE	28-3/8" PBL-30	34-3/8" PBL-36	40-3/8" PBL-42	46-3/8" PBL-48	52-3/8" PBL-54	58-3/8" PBL-60
C,CX, E200, E300, ER200, ER300, ER400, ER500, ER600, FX200, FX300, L2, SB100	30	36	42	48	54	60
B, D, E, G, GT	N/A	36	42	48	54	60
W	N/A	N/A	N/A	66	72	78, 84, 60
H, L, N	48	54	60	66	72	78
BXD, BX, BXV, M, Q, X	30	36	42	48	54	60
A, J, P, S, Z200	33 or 36	39 or 42	45 or 48	51 or 54	57 or 60	63
H2	42	48	54	60	66	72
AX, VX	31	37	43	49	55	61

Ductwork Installation

PML, PBL, and SS-BASE

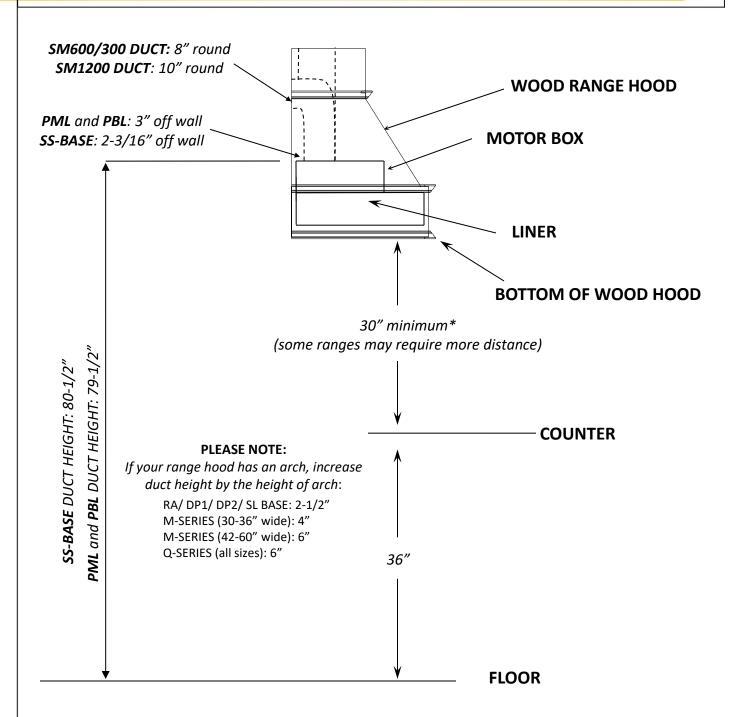

*Please note some cooktops require the range hood to be mounted higher than 30", see manufacturers specifications



This page left intentionally blank

IPL Ventilation

Imperial Premium Liners (IPL)

Imperial Premium Liners

- Dimmer controlled LED lighting
- Variable speed fan control
- Stainless Steel design w/ large, easy to clean aluminum mesh filters
- Large capture area
- •2 Internal motor combinations
- Sizes to fit 36" through 48" decorative range hoods
- Temperature-controlled auto-on feature



Stanisci Design ventilation has been engineered specifically for Stanisci Design Range Hoods, and are instock and ready to ship!

Features your customers want:

- Easy to clean filters
- Quiet, variable speed, single or dual blowers
- Dimmer controlled 5 Watt LED lighting, comparable to 50 Watt Halogen
- Temperature-controlled auto-on feature
- Three year in home warranty.





NOT APPROVED FOR USE IN CANADA


IPL Ventilation

Imperial Premium Liners (IPL)

635 IPL-635-XX	635 CFM motor
DUCTING	7" ROUND (4.25" off center)
AMPS	110V - 15 amp dedicated circuit
IPL-635-36: IPL-635-42:	34-3/8 W x 20-5/8 D 40-3/8 W x 20-5/8 D

Duct is offset 4-3/8" left. One or more adjustable 7"

990 IPL-990-XX	990 CFM motor		
DUCTING	10" ROUND		
AMPS	110V - 15 amp dedicated circuit		
IPL-990-36: IPL-990-42: IPL-990-48:	34-3/8 W x 20-5/8 D 40-3/8 W x 20-5/8 D 46-3/8 W x 20-5/8 D		

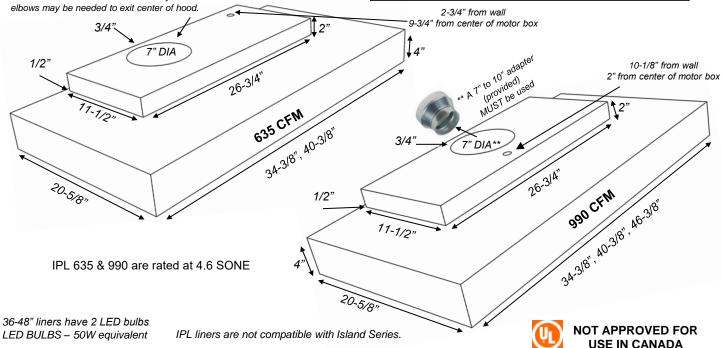

TED BOLDS = 30W equivalent II E lineis are not compatible with island oches.				USE IN CANADA
Wood Hood Model and Size	28-3/8"	34-3/8" IPL-36	40-3/8" IPL-42	46-3/8" IPL-48
C, CX, E200, E300, ER200, ER300, ER400, ER500, ER600, FX200, FX300, L2, SB100	N/A	36	42	48
B, D, E, G, GT	N/A	36	42	48
W	N/A	N/A	NA	66
H, L, N	48	54	60	66
BXD, BX, BXV, M, Q, X	N/A	36	42	48
A, J, P, S, Z200	N/A	39 or 42	45 or 48	51 or 54
H2	N/A	48	54	60
AX, VX	N/A	37	43	49

ISL Ventilation

Imperial Standard Liners (ISL)

Imperial Standard Liners

- LED lighting
- Two speed fan control
- Large capture area
- •Single 360 CFM Air Ring Fan
- •Liner sizes 30" and 36"
- Stainless Steel design
 w/ large, easy to clean
 aluminum mesh filters



Stanisci Design ventilation has been engineered specifically for Stanisci Design Range Hoods, and are instock and ready to ship!

Features your customers want:

- •Easy to clean filters
- Two speed fan control
- Single- 5 Watt LED, comparable to
 Watt Halogen with Hi-Lo switch
- Three year in home warranty
- Axial Fan






NOT APPROVED FOR USE IN CANADA

ISL Ventilation

Imperial Standard Liners (ISL)

360 ISL-360-XX	360 CFM motor		
DUCTING	7" ROUND		
AMPS	110V - 15 amp dedicated circuit		
ISL-360-30: ISL-360-36:	28-3/8 W x 20-5/8 D 34-3/8 W x 20-5/8 D		

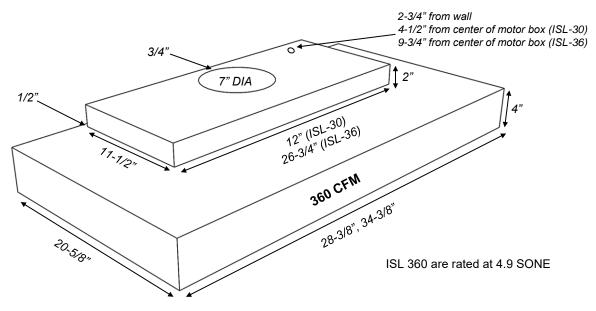

30" and 36" liners have 1 LED bulb LED BULBS – 50W equivalent

ISL liners are not compatible with Island Series.

Wood Hood Model and Size	28-3/8" ISL-30	34-3/8" ISL-36
C, CX, E200, E300, ER200, ER300, ER400, ER500, ER600, FX200, FX300, L2, SB100	30	36
B, D, E, G, GT	N/A	36
W	N/A	N/A
H, L, N	48	54
BXD, BX, BXV, M, Q, X	30	36
A, J, P, S, Z200	33 or 36	39 or 42
H2	42	48
AX, VX	31	37


PLEASE NOTE: Cleaning filter in a dishwashe may cause discoloration. A degreaser (409, Simple Green...) in a sink is recommended.



NOT APPROVED FOR USE IN CANADA

Ductwork Installation

ISL-360, IPL-635, and IPL-990

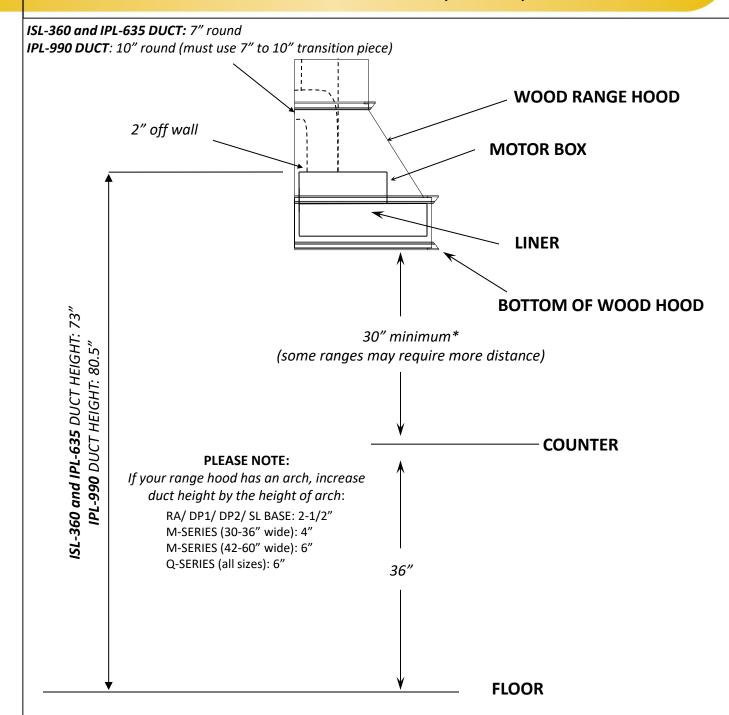

*Please note some cooktops require the range hood to be mounted higher than 30", see manufacturers specifications



Ventilation

Specification Guidelines

Ventilation fundamentals:

Length and width

No range hood on the market is completely effective unless it covers the heat source completely. Wall mounted hoods should extend at least to the front of the cooktop and on a standard cooktop, cover the entire cooktop from left to right. When using a residential commercial cooktop, the hood should overextend the cooktop a minimum of 3" on both the left and right side if possible.

Height

The bottom of the hood should be 30" from the cooking surface. It generally provides the most effective and attractive-looking installation. Some cooking appliance manufacturers require wood range hoods to be mounted higher. Please install according to the cooking appliance manufacturers recommendation.

In situations where ducting has several elbows or runs long distances, it is recommended to step up to the next larger blower size.

Internal Motors

Internal blowers are mounted inside the wood hood above the metal liner. They push the air through the duct.

Note: Externally mounted blowers are mounted outside the home typically on the roof or an exterior wall. We do not sell externally mounted blowers

System Noise

Noise is created in ventilation by air movement. Disrupting air flow with ducting turns increase noise. To minimize noise, run the ducting as straight as possible. The swirling of air within the blower unit also creates noise.

Back draft prevention:


Stanisci Design liners do not contain back draft dampers. If the cold or hot air has made its way to the range hood the kitchen will be affected. We recommend wall or roof caps with spring loaded dampers. We do not stock these, however they are readily available in the market.

MODIFICATIONS

Removable Options

REMOVABLE TOP (RT)


Base of the hood will be installed first with the ventilation. After all hook ups are complete – the chimney top will be attached. You will need a minimum of 3/4" clearance to lower chimney on guides. Cutting or trimming of parts in field will void warranty and compromise structural integrity.

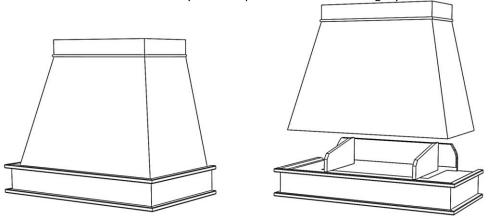

AVAILABLE ON THESE MODELS: B, BXDHW, BXHW, BXVHW, C, CX, E, E200, FX200, G, GT

REMOVABLE FRONT (RF)

Entire front section lifts straight up 3/4" and removes. Vent is easily installed, then front section is reattached. The rear cabinet box will be 16" deep (14" for J- Series). There is a 5/16" reveal on the front frame to box (adds 5/8" to overall width of front section only). A minimum 3/4" vertical clearance is needed between hood top and ceiling so that you can slide onto guides. Cutting or trimming of parts in field will void warranty and compromise structural integrity.

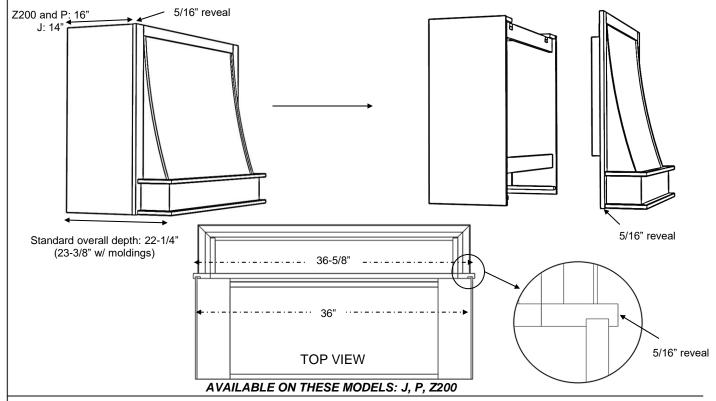

MODIFICATIONS

Removable Options Cont.


MODIFIED REMOVABLE PANEL (MRP)

Door panel is removable, and attaches with clips. Panel extends the full height of hood, and the lower seam is hidden behind a shelf. Crown can be laid on top of door once vent hook-ups are made.

STANDARD MRP


no fixed top rail, panel extends full height of hood.

AVAILABLE BY CUSTOM REQUEST 2" fixed top, 4" total top rail.

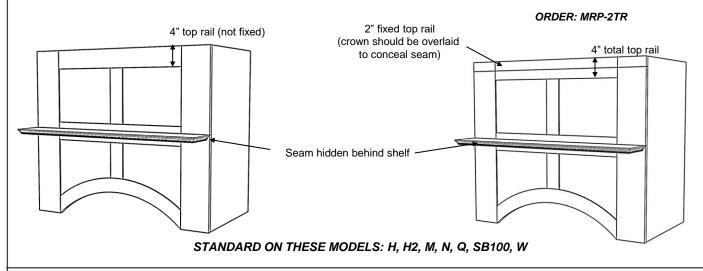

APPLIED REMOVABLE PANEL (ARP)

An access panel is cut into the face of the hood, and decorative molding is applied to cover the seam.

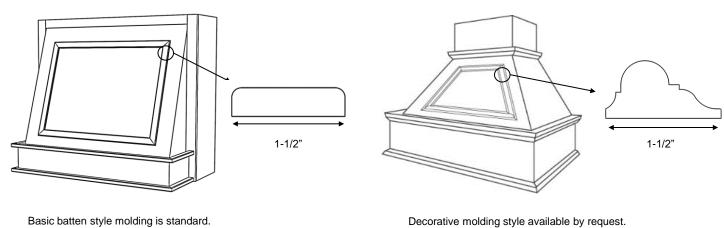

ARP-D


AVAILABLE ON THESE MODELS: C, CX, G, GT, I, J, P

MODIFICATIONS

Removable Options Cont.

STANDARD REMOVABLE DOOR PANEL

A door panel is applied onto the face of the hood, and is removable.

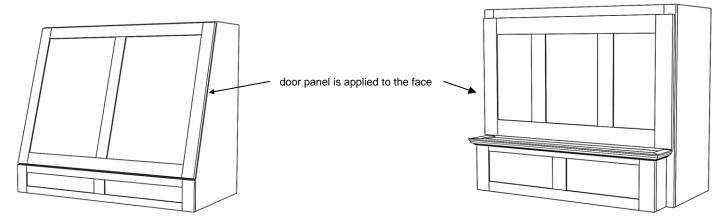


STANDARD ON THESE MODELS: FX300, L2, S*

On all S-Series models, door removes by pulling upwards. Minimum 1/2" clearance is needed above top of door.

BEADED ACCESS - CONCEALED

Decorative beading conceals 2 seams for the removable panel, secured by clips.

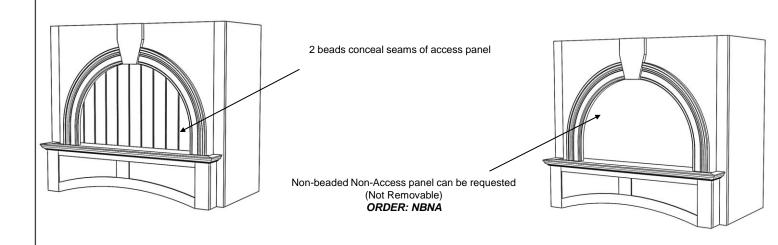


STANDARD ON THESE MODELS: A, L


MODIFICATIONS


Hardwood Battens

CURVED BATTENS

Curved Hardwood Battens are available in all of our standard species.







AVAILABLE ON E-SERIES


36" wide: 2 on face 42" and 48" wide: 3 on face 54" and 60" wide: 4 on face * side battens available by request


AVAILABLE ON E200, E300, ER200, ER300, ER400, ER500, ER600

30" – 48" wide: 4 battens on face 54" and 60" wide: 5 battens on face

Straight Battens

Vertical Hardwood Battens are available in all of our standard species.





30" – 48" wide: 4 battens on face Over 48" wide: 5 battens on face


AVAILABLE ON THESE MODELS: FX200, FX300, P

MODIFICATIONS

Hardwood and Molding Wraps for In-Series Hoods

Applied Hardwood Wrap

A 6" high hardwood wrap can be applied along the bottom of an In-Series hood to create the visual appearance of a separate base section. The wrap is shipped loose, and can be trimmed in-field to desired depth so sides remain flush for cabinet installation. This wrap can be applied in a different species than the hood to create a two-tone design.

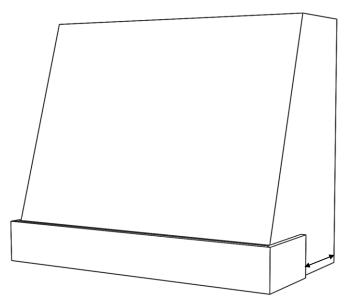


Please consider door swings and clearances. Your cabinet design may require fillers or extended stiles

Hardwood wrap will ship loose, and cut to full depth of hood. Can be trimmed in field to your desired depth.

AVAILABLE ON THESE MODELS: BX, BXV, E300, FX300, L2

Applied Molding Wrap

Basic style moldings can be applied along the top and bottom trim of the base panel and sides of In-Series hoods to create the visual appearance of a separate base section. Moldings are shipped loose, and can be trimmed infield to desired depth so sides remain flush for cabinet installation.



Please consider door swings and clearances. Your cabinet design may require fillers or extended stiles

Molding wrap will ship loose, and cut to full depth of hood. Can be trimmed in field to your desired depth.

AVAILABLE ON THESE MODELS: BX, BXV, E300, FX300, L2



This page left intentionally blank

Anvil[™] Finishing Program BY GROTHOUSE

AVAILABLE IN 8 STANDARD METAL FINISHES



*Representation shown of hood with Anvil™ Metal finish (Axel)



*Representation shown of hood with Anvil™ Metal finish (Exodus)



*Representation shown of grey painted hood with Hardwood Base Section in Anvil™ Metal finish (Ferrum)

Grothouse – Anvil™ Finish Program

Stanisci Design is partnering with Grothouse to bring their exclusive Anvil™ Finish Program to Stanisci Range Hoods and Accent Pieces.

STANISCI DESIGN

GROTHOUSE

The Anvil™ Metal coatings are exclusively available at Grothouse. They use a proprietary finish using real metals in copper, brass, steel, and more that are liquified and sprayed onto our wood hood, moldings, and decorative accent pieces. All finishing takes place at their headquarters in Germansville, PA.

The Anvil™ Finish program allows for elevated metallic design features that previously were unable to be crafted with solid metal. This will provide expansive design options and aggressive cost savings to comparable full metal hoods available in the marketplace. We also provide wood moldings that can be finished and applied as metal accent pieces including battens, applied hardwood and molding wraps. The wood moldings and accent pieces can be cut and installed like any traditional wood molding. These pieces are shipped from the factory, backed with an aggressive 3M backer tape to ensure trouble free adhesion to your wood hood once finished.

ANVIL FINISHING FOR YOUR STANISCI RANGE HOOD (8-10 WEEK LEAD TIME)

AVAILABLE ON THESE MODELS

AX, B, BXD, BX, BXV, C, CX, D, E, E200, E300, ER200, ER300, ER400, ER500, ER600, FX200, FX300, G, GT, J, K200, K300, P, Z200, OR HARDWOOD BASE ONLY ON ANY HW-SERIES

HOW DOES IT WORK?

YOUR RANGE HOOD AND ANVIL™ FINISH ORDER WILL BE DONE DIRECTLY WITH STANISCI DESIGN. ONCE YOUR HOOD HAS FINISHED PRODUCTION, STANISCI WILL HAVE IT SENT TO GROTHOUSE FOR FINSIHING, AND THEN TO YOU ONCE COMPLETE. *ALL ADDITIONAL SHIPPING COSTS FROM GROTHOUSE TO YOU ARE ALREADY INCLUDED IN THE COST OF FINISHING.

ANVIL FINISHING FOR DECORATIVE ACCENT PIECES (3-4 WEEK LEAD TIME)

AVAILABLE ON THESE DECORATIVE PIECES

CURVED BATTENS, STRAIGHT BATTENS, APPLIED HARDWOOD WRAPS, AND APPLIED MOLDING WRAPS

HOW DOES IT WORK?

YOUR ORDER AND FINISH REQUEST WILL BE DONE DIRECTLY WITH STANISCI DESIGN. THE RANGE HOOD WILL SHIP TO YOU IN THE STANDARD LEAD TIME, AND THE DECOATIVE ACCENTS W/ ANVIL™ METAL FINISH WILL SHIP TO YOU SEPARATELY IN APPROX 3-4 WEEKS AND HAVE AN AGGRESSIVE 3M BACKING TO ALLOW EASY AND SECURE FIELD INSTALLATION & ADHESION.

Anvil[™] Finishing Program BY GROTHOUSE

AVAILABLE IN 8 STANDARD METAL FINISHES

Anvil™ metal coatings are available in 4 smooth metallic color choices, and those same 4 finishes in a Cast version of the color. The Cast version of the color will provide a textured, vintage and antique look on the finish. All Anvil™ metal finishes will receive an overcoat of Grothouse Durata® clear finish to maintain the original metal finish.

AVAILABLE ANVIL™ METAL FINISHES




MODIFICATIONS

Hardwood Battens with Anvil™ Metal Finish

CURVED BATTENS WITH ANVIL™ METAL FINISH

*Representation shown of grey painted hood with Curved Hardwood Battens in Anvil™ Metal finish.







AVAILABLE ON E-SERIES

36" wide: 2 on face 42" and 48" wide: 3 on face 54" and 60" wide: 4 on face * side battens available by request AVAILABLE ON E200, E300, ER200, ER300, ER400, ER500, ER600

30" – 48" wide: 4 battens on face 54" and 60" wide: 5 battens on face

STRAIGHT BATTENS WITH ANVIL™ METAL FINISH

*Representation shown of grey painted hood with Straight Hardwood Battens in Anvil™ Metal finish.





30" – 48" wide: 4 battens on face Over 48" wide: 5 battens on face


AVAILABLE ON THESE MODELS: FX200, FX300, P

STANISCI MODIFICATIONS DESIGN Hardwood and Molding Wraps with Anvil™ Metal The Series Hoods

Finish for In-Series Hoods

Applied Hardwood Wrap with Anvil™ Metal Finish

A 6" high hardwood wrap with Anvil™ Metal Finish can be applied along the bottom of an In-Series hood to create the visual appearance of a separate metal base section. The wrap is shipped loose, and can be trimmed in-field to desired depth so sides remain flush for cabinet installation. This wrap will be finished and shipped directly from Grothouse.

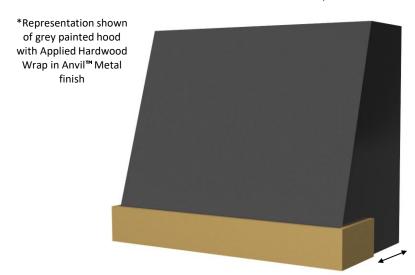


Please consider door swings and clearances. Your cabinet design may require fillers or extended stiles

Hardwood wrap will ship loose, and cut to full depth of hood. Can be trimmed in field to your desired depth.

AVAILABLE ON THESE MODELS: BX, BXV, E300, FX300, L2

Applied Molding Wrap with Anvil™ Metal Finish

Basic style moldings with Anvil™ Metal Finish can be applied along the top and bottom trim of the base panel and sides of In-Series hoods to create the visual appearance of a separate metal base section. Moldings are shipped loose, and can be trimmed infield to desired depth so sides remain flush for cabinet installation. These moldings will be finished and shipped directly from Grothouse.

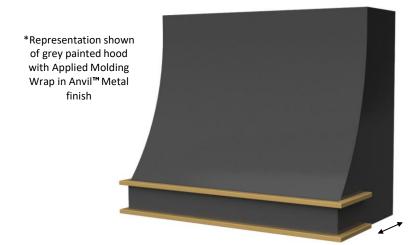


Please consider door swings and clearances. Your cabinet design may require fillers or extended stiles

Molding wrap will ship loose, and cut to full depth of hood. Can be trimmed in field to your desired depth.

AVAILABLE ON THESE MODELS: BX, BXV, E300, FX300, L2

ACCESSORIES

Sorrento Spice Rack Supports
DESIGNED FOR THESE MODELS: H2, N, (AVAILABLE BY REQUEST ON ALL OTHER MODELS)

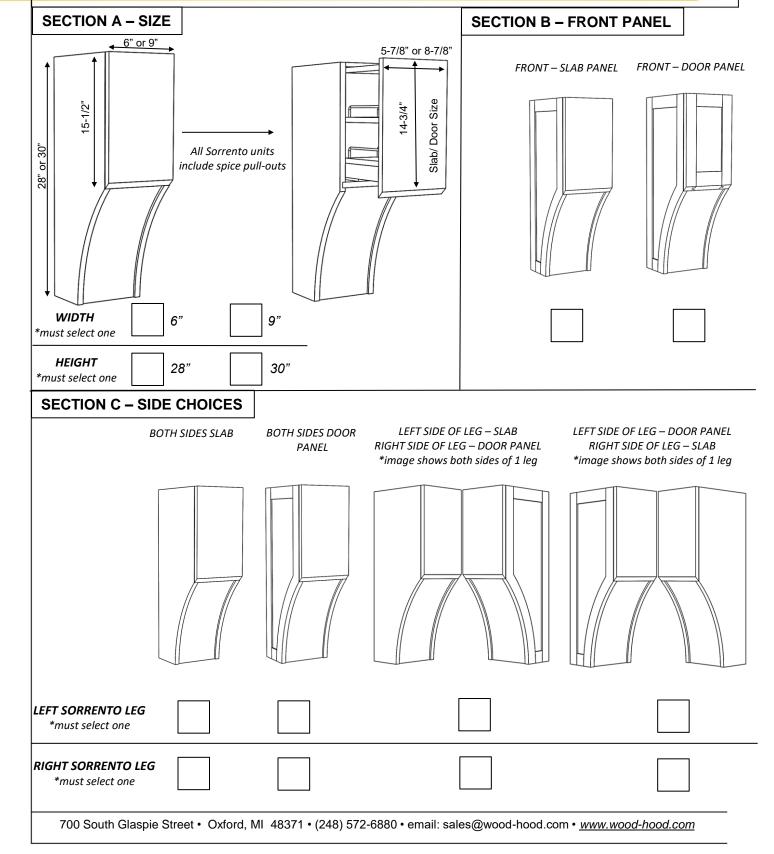

ACCESSORIES

Corbels & Carvings

Providence Shallow

CBL-PRS3

Princeton Wide

CBL-PRW3



3" x 4-3/4" x 10-1/2"



4-1/2" x 4-3/4" x 10-1/2"

Provincial

CBL-PPC3



CBL-ART3



5" x 5" x 10"



5" x 5" x 10"

Paint Grade, Maple, Red Oak, Cherry and Alder are in stock.

All other species are special-ordered, and increases lead time approx. 1-2 weeks.

(Please note drawings are not to scale, they have been adjusted to fit the page)

DIMENSIONS ARE: Width x Depth x Height

ACCESSORIES

Corbels & Carvings

_		• •	•		
Tra	nc		\mathbf{n}	ทว	
II a	113		ıv	Ha	

CBL-TR3

Traditional

COR-TT2



4-3/4" x 5-1/2" x 9-1/2"



4-1/4" x 4-5/8" x 10"

Acanthus

COR-AC2



ONL-AC24



5" x 5" x 10-1/2"



24" x 3/4" x 5-1/4"

Acanthus Corner Onlays

ONL-ACC3 (sold in pairs)



7-5/8" x 3/4" x 7-5/8"

Paint Grade, Maple, Red Oak, Cherry and Alder are in stock. All other species are special-ordered, and increases lead time approx. 1-2 weeks. (Please note drawings are not to scale, they have been adjusted to fit the page)

DIMENSIONS ARE: Width x Depth x Height



This page left intentionally blank