

Professional Baffle Filter Ventilators Technical Features


- Dimmer controlled LED lighting
- Variable speed fan control
- Large dishwasher safe brushed stainless steel baffle filters
- Double wall construction
- Large capture area
- Several blower combinations available
- Sizes to fit 30" through 60" decorative range hoods
- 22 gauge Stainless Steel



Stanisci Design liners are IN STOCK for immediate shipment. Ventilators are designed specifically to fit Stanisci Design wood range hoods or custom hoods of your design.

Features your customers want:

- Dishwasher safe filters
- Easy cleaning
- Dimmer controlled LED lighting
- Commercial design
- Three year in home warranty
- Quiet variable speed blower – made in Germany

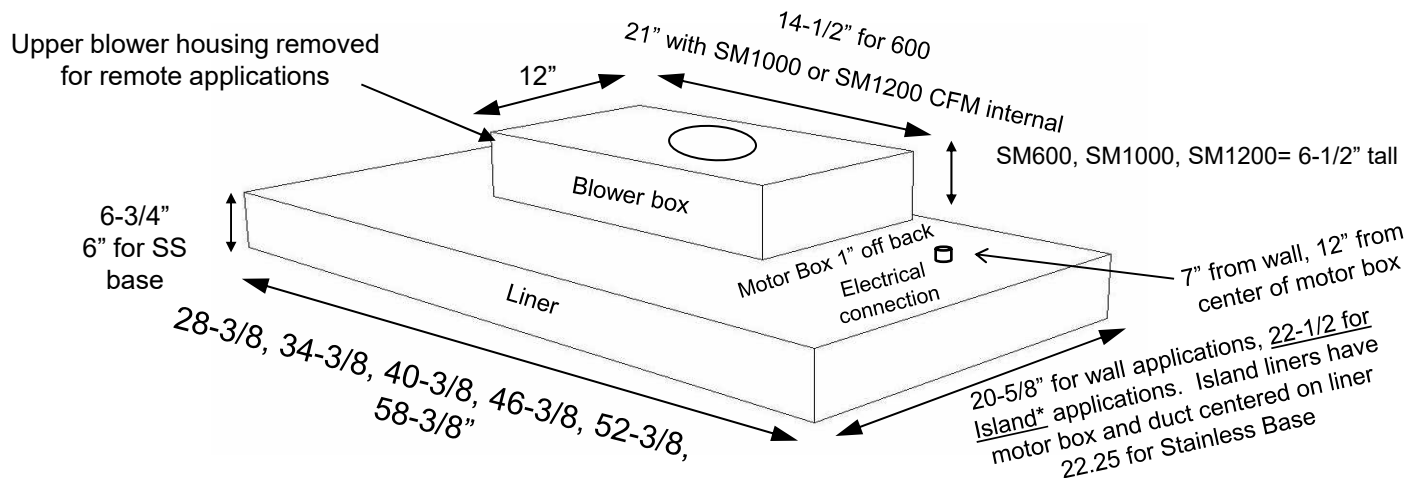

Model & CFM	AMPS	Ducting	Suggested Use
SM600(internal blower) with 300 CFM converter	5.0 110V - 15 amp circuit recommended	8" round	Standard range requiring less than 300 CFM & air makeup system not desired
PSL 600	5.0 110V – 15 amp circuit recommended	8" round	Standard range
PSL1000SM (internal blower)	7.0, 110V. 15 amp circuit recommended	10" round	Commercial range up to 48" wide without grill
PSL1200SM (internal blower)	7.0, 110V. 15 amp circuit recommended	10" round	Commercial range up to 48" wide without grill (not available for 30" liners)

30-42 has 2-50W LED lights, 48" has 3-50W LED lights; 54-60 has 4-50W LED lights. Halogen bulbs are available. All liners sent to California must have LED bulbs.

* Island applications add \$150 and an I to the nomenclature i.e. PML-600-36I



♦ 1000 CFM internal blower will not fit in 36" island hood

700 South Glaspie Street • Oxford, MI 48371 • (248) 572-6880 • email: sales@wood-hood.com • www.wood-hood.com

Vent Width / Model

Wood Hood Model and Size	28-3/8" 30	34-3/8" 36	40-3/8" 42	46-3/8" 48	52-3/8" 54	58-3/8" 60
G †, T †, I †**, C †, E2 † E3 †, FX2 †, CX †	30	36	42	48	54	60
H2 †	42	48	54	60	66	72
E †,, D, B, FX †, FX2 †	NA	36	42	48	54	60
AX	31	37	43	49	55	61
W †, O	NA	NA	NA	66	72	84, 90
H †, L, N	NA	54	60	66	72	84
M, Q, R, X, BX	30	36	42	48	54	60
S †, J †, A †, P †, Z200 †(min 31" ht)	33	39	45	51	57	63

† - Certain hoods need to have their base height increased to accommodate the taller baffle liner: See hood spec sheet under – “BAFFLE LINER ADJUSTMENTS”

Increase by 1" on G

Increase by 1" on G, T, I, E, W, H, H2, S, J or A – if base is RA, DP2

Increase by 2" on G, T, I, E, W, H, H2, S, J, CSL or A – if base is DP1

Increase by 2.75 on all CPL, P's, FX2, FX2PL, E2PL, E3, Z200, FX, L2 and Hardwood (HW) base option hoods (min height of 8.75")

Increase by 1" on B, N and D – if base is DP1

This is a n/c adjustment which will be made automatically if hood and liner are ordered together.